

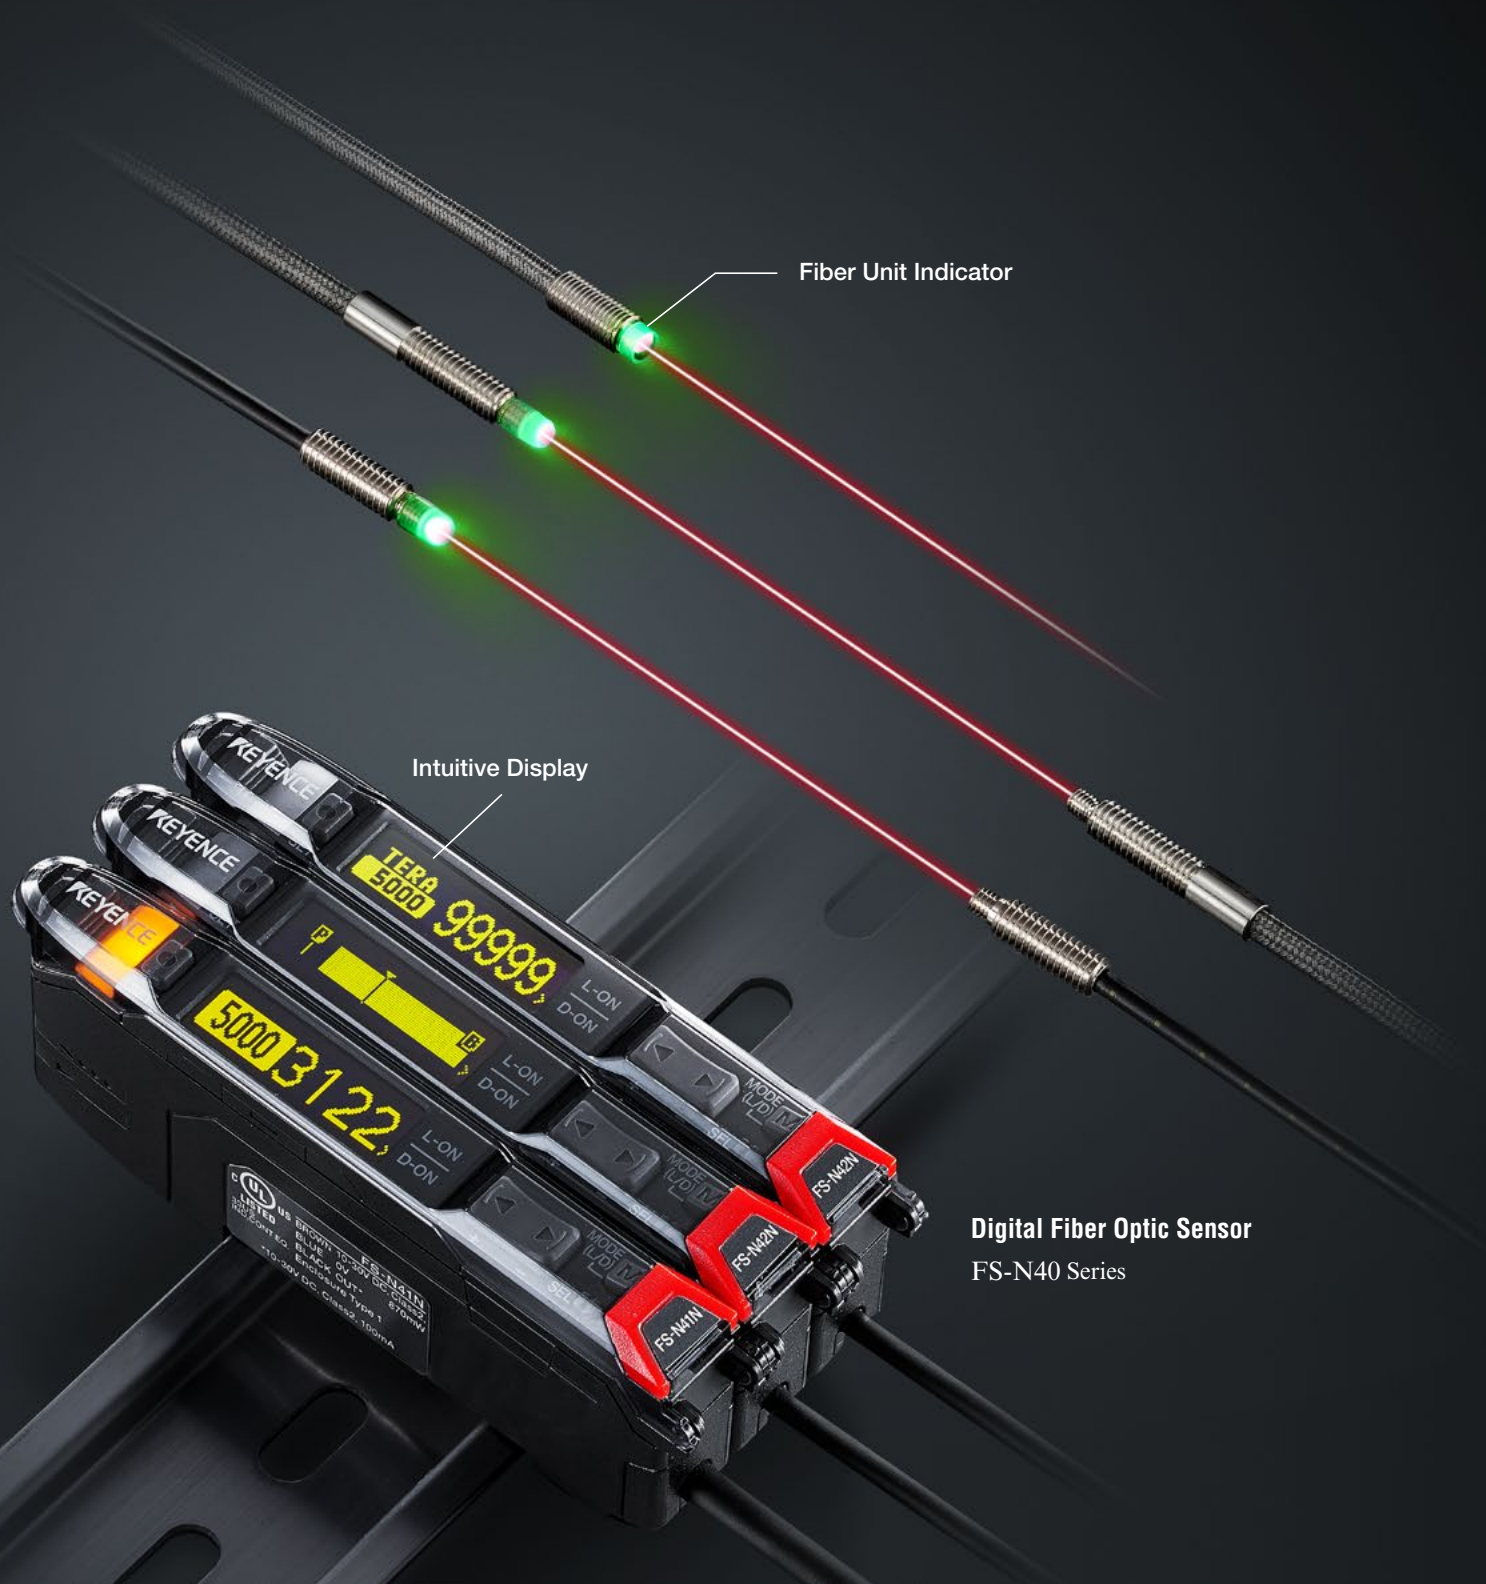
A Return To Simplified Sensing



A Genuine All-Purpose Solution
Easier and More Stable Than Ever Before

A SIMPLE and RELIABLE Solution for Any Application

Fiber optic sensors provide a variety of solutions that are unmatched by any other type of sensor. The high-powered, yet precise, amplifier combines with a variety of flexible and compact fiber heads to tackle all sensing needs.



Digital Fiber Optic Sensor
FS-N40 Series

THE POWER OF FIBER OPTIC SENSING

FLEXIBLE

Handle any and all applications with one high-powered amplifier and a variety of head options.

- Detect Anything
- Detect Anywhere



SIMPLE

Setup is handled quickly and easily with this intuitive amplifier.

- Easy to Read Display
- Innovative Fiber Units



RELIABLE

Detection remains stable in any situation or environment.

- Built-In Preventive Maintenance
- Clear Status Indication



Flexible

Enhanced power makes the FS-N40 Series more capable than ever before.

NEO Parabolic LED

TERA Switch

Power Select Switch

Go from standard to high-power with the flick of a switch

Detect Anything




Contrasts/
Surface Finishes



Distant
Targets



Transparent
Targets




Targets in
Varying Positions



Small
Targets


Detect Anywhere




Tight
Spaces




Oily/Wet
Environments



High Temperature
Environments



Environments with
Chemicals



On Robotic
Arms

Long Range and Stable Detection with Any Head

With industry leading high-power, the FS-N40 Series enables long range detection with even the thinnest of fiber heads. This also ensures detection remains stable in environment where build-up occurs.



Thrubeam [1 mm 0.04" Cylindrical]	Previous (FINE)	FS-N40 (TERA)
	140 mm 5.51"	800 mm 31.50"
Reflective [M3 Threaded]	Previous (FINE)	FS-N40 (TERA)
	72 mm 2.83"	590 mm 23.23"

Increased Detection Capabilities

The FS-N40 Series has not only increased its power, but has also greatly improved its signal to noise ratio. This allows for consistent and reliable detection of changes in contrast, surface finish, and position.

Contrast changes



Surface finish changes



Simple position changes

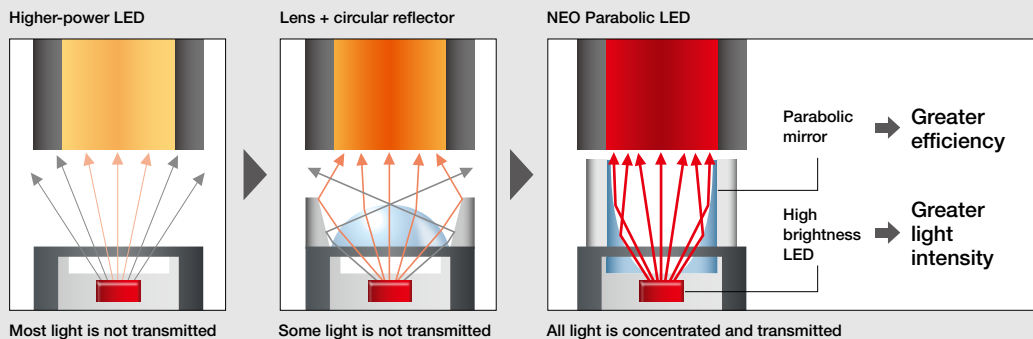


Deeper Understanding

New LED Module - "NEO Parabolic LED"

The high-power of the FS-N40 Series is derived from the use of a new LED module. This module boasts a high brightness LED and efficient circuit design, along with a parabolic mirror that ensures the majority of the light is transmitted into the fiber optic cable.

Evolution of LED Modules



Simple

NEW INNOVATION

Easy to Read Display


No manuals required with this easy to understand interface.



Conventional Display



FS-N40 Display



Innovative OLED Display

The introduction of an OLED display places the FS-N40 Series leaps-and-bounds ahead of conventional fiber amplifiers. The ability to see clear and detailed information on a single screen dramatically reduces setup time.

Bar Graph Display

Simplify the display even further by representing the light intensity as a bar graph. This comes complete with a threshold point indicator and peak/bottom value flags.



Peak value ON/OFF point Bottom value

Easily Understandable Messages

No need to decipher cryptic display messages. Identify any issues or scenarios that the sensor may be experiencing by simply reading the display.

System Error

Keys Locked

Low Intensity

Check Dip Switch

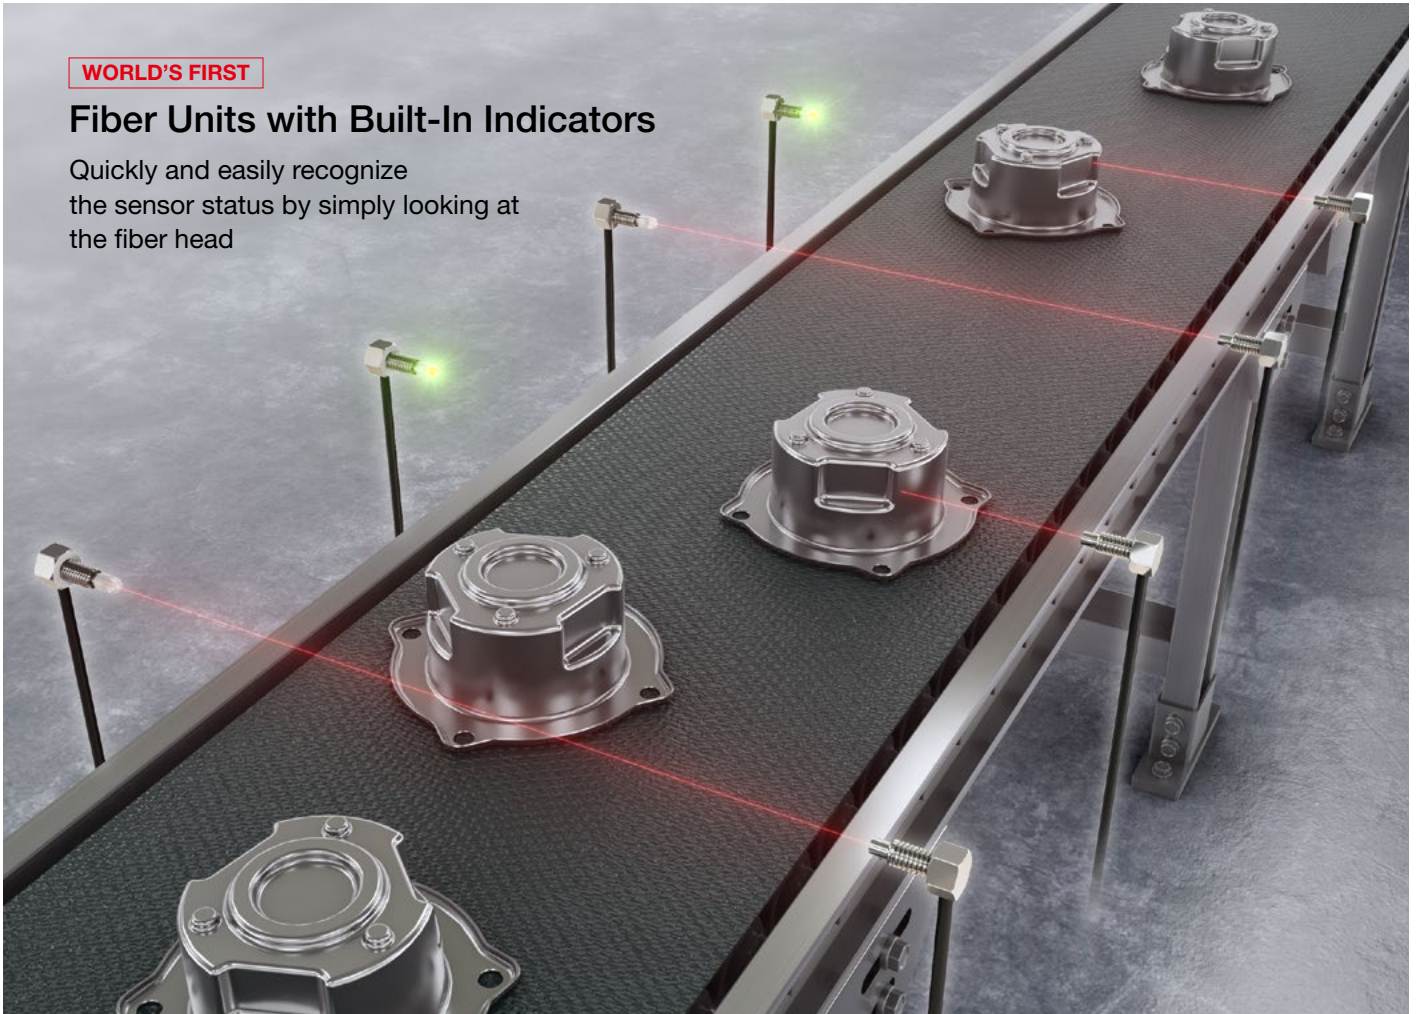
Saturate Cancel

PIN Code

WORLD'S FIRST

Fiber Units with Built-In Indicators

Quickly and easily recognize the sensor status by simply looking at the fiber head




Integrated ON/OFF Status Indicators

It is no longer necessary to look inside of a control box and locate the proper amplifier to determine the detection status of a specific sensor. These innovative fiber heads, will light in Green when the output is ON for immediate recognition of the sensor status.

Alignment Assistance

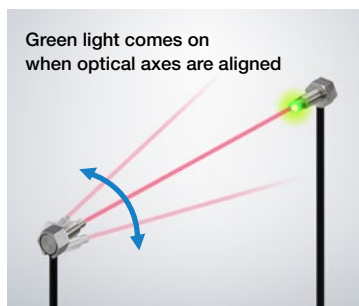Alignment has never been simpler with Optical Axis Assistance. The fiber unit illuminates when the two heads are aligned, eliminating the guesswork and time associated with alignment.



Green light comes on when optical axes are aligned

Easy Head Identification

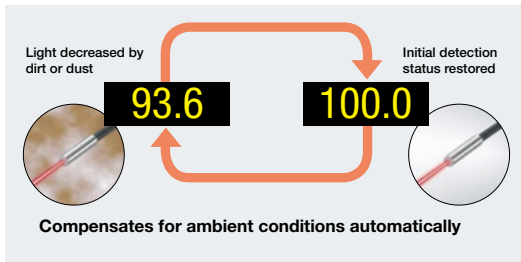
Quickly recognize which head is being programmed by lighting the fiber head in green. This prevents any unnecessary confusion during setup.



Built-In Preventive Maintenance Features


Harsh Environment Adjustment

Datum mode automatically adjusts the live and set values to compensate for build-up and maintain stable detection.




Automatic Power Control

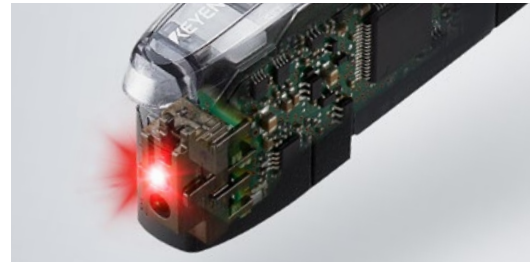When high precision detection is of the utmost concern, the light intensity can be automatically regulated to ignore the effects of power fluctuations.



Interference Prevention

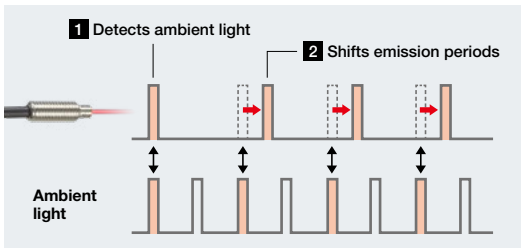Prevent interference between up to 16 units that are connected together (KEYENCE 1-Line System), or 2 units that are not connected together.



Heat Sink

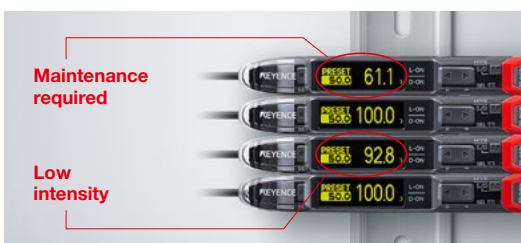
Concerns about heat generation, and temperature induced strain on internal component, are eliminated with the built-in heat sink.



Customizable Interface for Clear Status Indications

Uniform Calibration and Display

With the push of a button, the set value and current value can be automatically calibrated to 50.0% and 100.0% respectively. This enables easy identification of detection statuses and maintenance needs at a glance.



Various Display Option

The FS-N40 Series offers countless display and sub-display options. This allows users to view the data how they see fit and ensures clear understanding.



Additional Features

Highly Visible Indicator

The highly visible indicator, with an area 8.7x larger than conventional models, ensure that the ON/OFF status of the sensor can be seen from a distance.



Saturation Canceling

A simple button combination is all that is needed to eliminate saturation and ensure stable detection of transparent, tiny, or highly reflective targets.



Network Compatibility

Industrial network integration is possible with the use of the KEYENCE NU Series. Multiple network options are available!



EtherNet/IP™
DeviceNet™
CC-Link V2
EtherCAT®

IO-Link Compatibility

(FS-N41C Only)

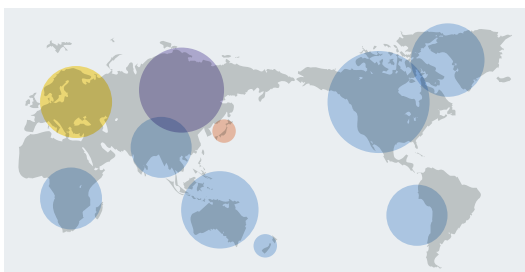
The FS-N41C amplifier can communicate a large variety of information over IO-Link. This includes the live value, set value, settings, and much more.



IO-Link

Selectable Language Options


Language selection options for English, Japanese, Chinese, and German have been added to guarantee global ease-of-use.



Bipolar Outputs

(FS-N41C Only)

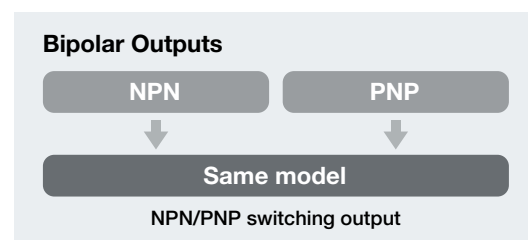Regardless of NPN or PNP output needs, only one part number is required. The FS-N41C offers a bipolar selectable output.



Multi-Output Unit

Dramatic Reductions in Cost and Time

Reduce Startup, Operation, and Maintenance Workloads

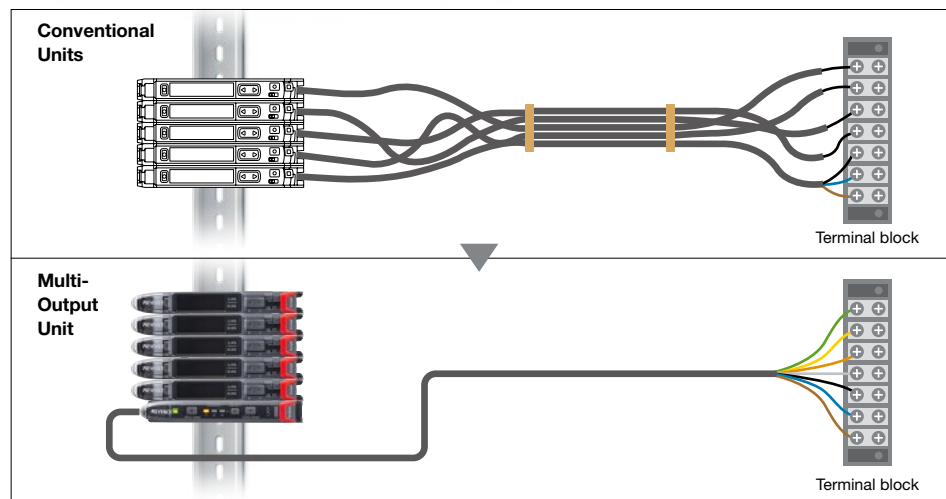
Multi-Output Unit
FS-MC8N/P



Fibers and cables on
one side ONLY

Reduced Cables

The Multi-Output Unit provides a clean cable layout with just one power supply/output cable coming from the device. Replacing or adding sensors has also never been easier; since now there is no longer a need to reroute cables.



Memory Function

The settings for up to 8 connected amplifiers can be saved on the Multi-Output Unit. If any of the amplifiers need to be replaced, the settings can be batch written to the new amplifiers, eliminating the need for any manual recalibration. Up to 3 memory banks can be configured to provide easy changeover between different runs on a machine.



Benefits During Every Stage of Use

Setup

Duplicate settings for fiber amplifiers installed on standard machines.

Changeover

Quickly switch between 3 bank of settings when running different parts.

Troubleshooting

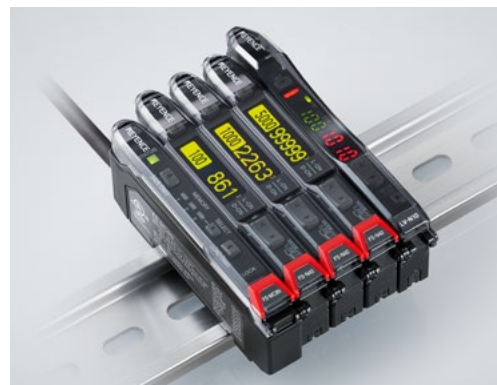
Return the sensors to their correct settings with the push of a button.

Maintenance

When replacing a unit, transfer necessary settings in seconds.

Easily Add Amplifiers without Extra Wiring


Adding amplifiers is a breeze with only one cable needing to be routed for the entire setup. Route this multi-core cable once and simply connect amplifiers as they become necessary.



Versatile Wiring and Expansion Options Options for Any Situation


When Network Compatibility is Necessary

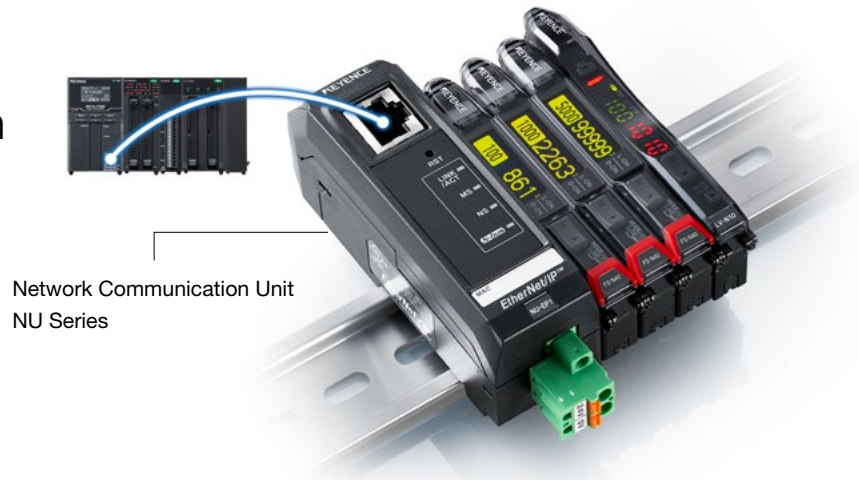Network
Communication
Unit




When Saving Space is Important

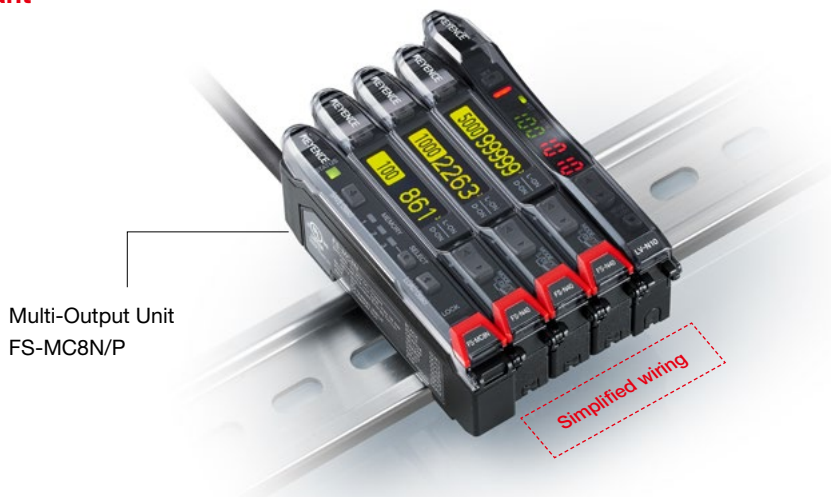Multi-Output Unit



When Standard Connections are Adequate

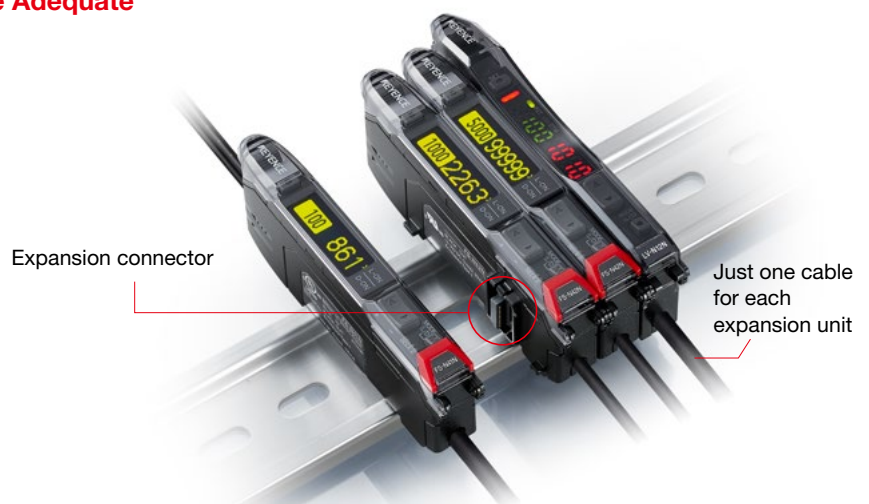Main Unit +
Expansion Units



Compatible with a range of open industrial networks

- Control multiple sensors at once via network communication



*EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Increase Efficiency During Startup, Operation, and Maintenance

- Memory function enables speedy settings recovery and easy changeover
- Drastically decreases the number of necessary cables

Simplified Wiring

Easy Program Changeover

Effortless Maintenance

Best-Selling and Reliable Simplified Wiring

- Connect up to 17 amplifiers, featuring stable interference prevention

Lineup

Amplifier Units

Cable type



Type		Model		Control outputs	External input
		NPN output	PNP output		
Standard	Main unit	FS-N41N	FS-N41P	1	0
	Expansion unit	FS-N42N	FS-N42P		
2-Output	Main unit	FS-N43N	FS-N43P	2	1
	Expansion unit	FS-N44N	FS-N44P		

M8 Connector type



Type	Model	Control outputs	External input
	Switchable between NPN/PNP output		
Main unit	FS-N41C	2*	1*

^{*}Switchable between 2 control outputs or 1 control output + 1 external input.
The system is not compatible with expansion units.

Zero line type



Type	Model	Control output
Expansion unit	FS-N40	None [*]

^{*}Counted as 1 output if expanded with Multi-Output Unit FS-MC8N/P or the NU Series communication unit.

Network Units

Type	Appearance	Network	Model
Communication unit		EtherNet/IP™	NU-EP1
		DeviceNet®	NU-DN1
		EtherCAT®	NU-EC1
		CC-Link	NU-CL1

Multi-Output Units



Type	Model		Separate control outputs	Common output	Common input
	NPN output	PNP output			
Main unit	FS-MC8N	FS-MC8P	8	1	1

Optional Parts (sold separately¹)

Amplifier securing bracket (for main unit)



Description	Model
	OP-88245

End units¹ (when using expansion units)



Description	Model
	OP-26751 (Set of 2)

M8 connector cable
2 m 6.6'/10 m 32.8'



Description	Model
	2 m 6.6' type OP-73864
	10 m 32.8' type OP-73865

Expansion converter unit



Description	Model
This adapter allows the FS-N40 series to connect to non-NEO type expansion units using the KEYENCE 1-Line System.	OP-87199

¹ Multi-output units come with end units.

Network Unit Optional Parts (sold separately)

Model	Type
OP-79426	Version 1.10 supported CC-Link dedicated cable 20 m 65.6'
OP-79427	Version 1.10 supported CC-Link dedicated cable 100 m 328.1'
OP-51504	STP (Shielded twisted-pair) cable 0.2 m 0.7'
OP-51505	STP (Shielded twisted-pair) cable 0.5 m 1.6'
OP-51506	STP (Shielded twisted-pair) cable 1 m 3.3'
OP-51507	STP (Shielded twisted-pair) cable 3 m 9.8'
OP-51508	STP (Shielded twisted-pair) cable 5 m 16.4'
OP-51509	STP (Shielded twisted-pair) cable 10 m 32.8'
OP-84338¹	e-CON connector (2 pieces included)

¹ Use a cable with sheath outer diameter of 1.15 to 1.35 mm 0.045" to 0.053" and wire range of 0.1 to 0.5 mm² 0.000155 to 0.000775".
To connect a device using a cable other than as specified above, prepare an e-CON connector that conforms with its wire diameter.

Fiber Unit Index

Model	Page
FU-10	P29
FU-11	P33
FU-12	P24
FU-13	P34
FU-15	
FU-16	P21
FU-16Z	
FU-18	
FU-18M	
FU-20	P29
FU-21X	P26 · 28
FU-22X	P27 · 31
FU-23X	P27
FU-24X	P26 · 28
FU-25	P26
FU-31	P30
FU-32	P22
FU-33	P30
FU-34	P22
FU-35FA	P26 · 28 · 29
FU-35FG	P19 · 28 · 29
FU-35FZ	P26 · 28 · 29
FU-35TG	P19 · 28 · 29
FU-35TZ	P26 · 28 · 29
FU-37	P30
FU-38	
FU-38H	P32
FU-38K	
FU-38L	P30
FU-38LK	P32
FU-38R	P30
FU-38S	
FU-38V	
FU-4F	P27
FU-4FZ	
FU-40	P28
FU-40G	
FU-40S	P30
FU-41TZ	
FU-42TZ	
FU-43	P31
FU-43TZ	P30
FU-44TZ	
FU-45X	P27 · 31
FU-46	
FU-47TZ	P30
FU-48	P27 · 31
FU-48U	
FU-49U	
FU-49X	

Thrubeam Lenses	P25
--------------------	-----

Model	Page
FU-5F	P21
FU-5FZ	
FU-50	
FU-51TZ	P22
FU-52TZ	
FU-53TZ	
FU-54TZ	
FU-55	P21
FU-56	P21 · 22
FU-56TZ	P22
FU-57TE	P23
FU-57TZ	P22
FU-58	P21
FU-58U	P21 · 23
FU-59	
FU-59U	
FU-6F	P26
FU-61	
FU-61Z	
FU-63	P31
FU-63T	
FU-63Z	
FU-65X	
FU-66	P26
FU-66TZ	
FU-66Z	
FU-67	
FU-67G	P19
FU-67MG	
FU-67MTG	
FU-67TG	
FU-67TZ	P26
FU-67V	
FU-68	P31
FU-69U	
FU-69X	
FU-7F	P20
FU-70U	P23
FU-70TZ	P20
FU-70TU	P23
FU-71	P20
FU-71Z	
FU-73	P22
FU-75F	
FU-76F	
FU-77	P20
FU-77G	P19
FU-77MG	
FU-77MTG	
FU-77TG	
FU-77TZ	P20
FU-77V	
FU-78	

Reflective Lenses	P28 · 29
----------------------	----------

Model	Page
FU-79	P23
FU-79U	
FU-80TZ	
FU-80MTZ	
FU-81C	P32
FU-82C	
FU-83C	
FU-84C	P24
FU-85A	P32
FU-85H	
FU-85ZA	
FU-86A	P24
FU-86H	
FU-86ZA	
FU-87	P32
FU-87K	
FU-88	P24
FU-88K	
FU-91	P32
FU-92	P23
FU-93	P33
FU-93Z	
FU-95	
FU-95HA	
FU-95S	
FU-95W	
FU-95Z	
FU-96	P23
FU-96T	
FU-97P	P32
FU-97S	
FU-98	P23
FU-A05	P24
FU-A05D	P33
FU-A10	P24
FU-A10D	P33
FU-A40	P24
FU-A100	
FU-E11	
FU-E40	
FU-L50Z	P20
FU-L51Z	
FU-L52Z	
FU-L53Z	
FU-L54Z	
FU-L41Z	P27
FU-R6F	P18
FU-R67	
FU-R67G	
FU-R67TG	
FU-R67TZ	
FU-R7F	
FU-R77	
FU-R77G	
FU-R77TG	
FU-R77TZ	
FU-V7FN	P35
FU-V84	
FU-V84L	
FU-2303	P19 · 28 · 29
FU-2540	P29



Fiber Units

FU Series



Solve Any and All Applications

Mounting/Space Constraints

Integrated Bracket Fibers

The fiber is already integrated into a L-shaped bracket for quick and painless installation.



Thrubeam Models

P20

Reflective Models

P27

Threaded and Hex-shaped Fibers

Threaded models can be easily mounted to a machine with one or two nuts.

Hex-shaped model provide easy cable routing and prevent snagging.



Thrubeam Models

P20

Reflective Models

P26

Difficult Detection Targets

Long Distance Targets

By focusing the light being emitted, these fibers can see targets at distances that are too far for conventional fibers.



Thrubeam Models


P21

Reflective Models

P28

Transparent Targets

The use of a reflector allows these fibers to stably detect transparent targets with ease.



Retro-Reflective Models

P34

Demanding Environments

High Traffic/Guarded

Perfect for high traffic environments, these guarded fibers will not be damaged by crushing, pinching, or snagging.



Thrubeam Models

P19

Reflective Models

P19

Oil/Chemical Exposure

The fluorocarbon resin coating allows these fiber units to be used in locations where oil or chemical exposure is constant.



Thrubeam Models

P23

Reflective Models

P32

Flat Bracket Fibers

These low profile fibers provide a compact design and integrated mounting holes for easy installation in tight spaces.



Thrubeam Models

P22

Reflective Models

P30

Cylindrical Fibers

These fibers can fit in nearly any location and are held in place with a set screw.



Thrubeam Models

P21

Reflective Models

P27

Sleeve Type Fibers

These fibers feature a thin sleeve that can be routed into the necessary detection location, while being secured somewhere else.



Thrubeam Models

P22

Reflective Models

P30

Varied Position/Falling Targets

By looking over an area, instead of a fixed point, it is possible to detect falling targets or targets that are not in repeatable positions.



Thrubeam Models

P24

Reflective Models

P33

Small Targets

With the use of built-in or attachable lenses, the light is focused to a fine point for consistent small target detection.




Reflective Models

P28

Liquid Levels

It is possible to reliably detect liquid levels using fibers. This can be done through immersion or by attaching them to a transparent tube.



Reflective Models

P33

Robotic Arms/Constant Motion

With bend ratings of up to 50 million bends (typical value), these fibers are ideal for robotic integration or anywhere consistent bending occurs.



Thrubeam Models

P23

Reflective Models

P31

Vacuum Chambers

These specially designed fibers can be used in vacuum environments and still provide stable detection.




Thrubeam Models

P35

High Temperature Locations

Detect targets in high temperature environments with fibers that can withstand temperatures of up to 350°C 662°F.



Thrubeam Models

P24

Reflective Models





P32

Featured Fibers

NEW ACTIVE RECEIVER FIBER UNITS

Thrubeam

Threaded and Hex-Shaped Active Receiver Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
Size / Shape					TERA (Longest) FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
M4	Hex-shaped		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	 3600 141.73"  640 25.20"	3100 122.05" 2100 82.68" 1300 51.18"	880 34.65" 320 12.60" 190 7.48"	Transmitter: ø1 ø0.04" Receiver: ø3.2 ø0.13"	FU-R77TZ Approx. 25g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	 1800 70.87"  640 25.20"	1800 70.87" 1800 70.87" 1300 51.18"	880 34.65" 320 12.60" 190 7.48"		FU-R77TG Approx. 43g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	 3600 141.73"  880 34.65"	3600 141.73" 3000 118.11" 1800 70.87"	1300 51.18" 430 16.93" 240 9.45"	FU-R77 Approx. 21g	
			2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +60°C (-40 to +140°F)	R25 R0.98"	 3600 141.73"  1100 43.31"	3600 141.73" 3200 125.98" 2200 86.61"	1500 59.06" 540 21.26" 290 11.42"	FU-R77F Approx. 21g	
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	 1800 70.87"  880 34.65"	1800 70.87" 1800 70.87" 1300 51.18"	430 16.93" 240 9.45"	FU-R77G Approx. 41g	

*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87") is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Reflective




Threaded and Hex-Shaped Active Receiver Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Model Weight
Size / Shape					MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
					TERA (Longest) FINE (Initial)			
M6	Hex-shaped		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	790 31.10" 210 8.27"	710 27.95" 550 21.65" 470 18.50"	310 12.20" 90 3.54" 56 2.20"	FU-R67TZ Approx. 25g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	790 31.10" 210 8.27"	710 27.95" 550 21.65" 470 18.50"	310 12.20" 90 3.54" 56 2.20"	FU-R67TG Approx. 32g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	FU-R67 Approx. 21g
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +60°C (-40 to +140°F)	R25 R0.98"	1150 45.28" 300 11.81"	1100 43.31" 860 33.86" 570 22.44"	410 16.14" 140 5.51" 67 2.64"	FU-R67F Approx. 21g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	FU-R67G Approx. 29g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only).





ARMOR GUARDED FIBER UNITS

Thrubeam

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
Size / Shape	TERA (Longest) FINE (Initial)				Other power modes				
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD			
M4	Hex-shaped		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel	1800 70.87" 1100 43.31" Lens attachment ▶ P25	1800 70.87" 1800 70.87" 1800 70.87"	1400 55.12" 430 16.93" 280 11.02"	ø1.13 ø0.04"	FU-77TG Approx. 43g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R20 R0.79" Stainless Steel	1800 70.87" 1100 43.31" Lens attachment ▶ P25	1800 70.87" 1800 70.87" 1800 70.87"	1400 55.12" 430 16.93" 280 11.02"		FU-77MTG Approx. 100g
	Threaded		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel	1800 70.87" 1100 43.31" Lens attachment ▶ P25	1800 70.87" 1800 70.87" 1800 70.87"	1400 55.12" 430 16.93" 280 11.02"		FU-77G Approx. 39g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R20 R0.79" Stainless Steel	1800 70.87" 1100 43.31" Lens attachment ▶ P25	1800 70.87" 1800 70.87" 1800 70.87"	1400 55.12" 430 16.93" 280 11.02"		FU-77MG Approx. 100g







*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87") is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Reflective

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight	
Size / Shape	Detecting arrangement				 TERA (Longest)  FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
M3	Threaded	 18 0.71" M3	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39"	 590 23.23"  130 5.12" Lens attachment ▶ P28	540 21.26" 420 16.54" 320 12.60"	190 7.48" 47 1.85" 28 1.10"	FU-2303 Approx. 20g	
			1 m 3.3' Free-cut (ø1.3 ø0.05" × 2) spiral 30 cm 11.81" -40 to +50°C (-40 to +122°F)	R10 R0.39"	 590 23.23"  130 5.12" Lens attachment ▶ P28	540 21.26" 420 16.54" 320 12.60"	190 7.48" 47 1.85" 28 1.10"	FU-35FG Approx. 15g	
M6	Hex-shaped	 17 0.67" M6	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	Stainless Steel	 900 35.43"  380 14.96"	830 32.68" 730 28.74" 670 26.38"	520 20.47" 150 5.91" 89 3.50"	FU-67TG Approx. 32g	
			 20.5 0.81" M6	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R25 R0.98" Stainless Steel	 900 35.43"  380 14.96"	830 32.68" 730 28.74" 670 26.38"	520 20.47" 150 5.91" 89 3.50"	FU-67MTG Approx. 80g
	Coaxial	 22.5 0.89" M6	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel	 580 22.83"  120 4.72" Lens attachment ▶ P28	530 20.87" 390 15.35" 250 9.84"	170 6.69" 45 1.77" 27 1.06"	FU-35TG Approx. 32g	
			 29 1.14" M6	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R25 R0.98" Stainless Steel	 1100 43.31"  380 14.96"	1000 39.37" 830 32.68" 610 24.02"	500 19.69" 150 5.91" 88 3.46"	FU-67MG Approx. 70g
	Threaded	Parallel	 17 0.67" M6	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel	 1100 43.31"  380 14.96"	1000 39.37" 830 32.68" 610 24.02"	500 19.69" 150 5.91" 88 3.46"	FU-67G Approx. 29g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Threaded and Hex-Shaped Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Optical axis diameter (mm inch)	Model Weight
Size / Shape					 TERA (Longest)  FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
M4	Hex-shaped		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	 3600 141.73"  1100 43.31" Lens attachment ▶ P25	3600 141.73" 3000 118.11" 1900 74.80"	1400 55.12" 430 16.93" 280 11.02"	ø1.13 ø0.04"	FU-77TZ Approx. 25g
			2 m 6.6' Free-cut (ø2.2 ø0.09") -20 to +50°C (-4 to +122°F)	R1 R0.04" ToughFlex	 3600 141.73"  2000 78.74"	3600 141.73" 3600 141.73" 3600 141.73"	2500 98.43" 1200 47.24" 720 28.35"	ø2.3 ø0.09"	FU-70TZ Approx. 22g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R0.5 R0.02" ToughFlex	 3600 141.73"  1100 43.31" Lens attachment ▶ P25	3600 141.73" 3000 118.11" 1900 74.80"	1400 55.12" 430 16.93" 280 11.02"	ø1.13 ø0.04"	FU-77V Approx. 25g
			2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R25 R0.98"	 3600 141.73"  1500 59.06" Lens attachment ▶ P25	3600 141.73" 3600 141.73" 2600 102.36"	1900 74.80" 540 21.26" 310 12.20"	ø1 ø0.04"	FU-7F Approx. 21g
			2 m 6.6' Free-cut (ø1.3 ø0.05") -40 to +70°C (-40 to +158°F)	R4 R0.16"	 3600 141.73"  760 29.92" Lens attachment ▶ P25	2800 110.24" 2100 82.68" 1300 51.18"	1000 39.37" 260 10.24" 180 7.09"	ø1 ø0.04"	FU-78 Approx. 9g
			2 m 6.6' Free-cut (ø2.2 ø0.09") FU-71Z: -40 to +50°C (-40 to +122°F) FU-71: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	 3600 141.73"  2000 78.74"	3600 141.73" 3600 141.73" 3600 141.73"	2700 106.30" 880 34.65" 540 21.26"	ø1.5 ø0.06"	FU-71Z Approx. 25g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09") FU-71Z: -40 to +50°C (-40 to +122°F) FU-71: -40 to +70°C (-40 to +158°F)	R25 R0.98"	 3600 141.73"  2400 94.49"	3600 141.73" 3600 141.73" 3600 141.73"	3000 118.11" 1000 39.37" 590 23.23"	ø1.5 ø0.06"	FU-71 Approx. 25g

*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87") is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Integrated Bracket Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*		Optical axis diameter (mm inch)	Model Weight	
Beam emitting direction	Optical axis height				TERA (Longest) FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER			TURBO HSPD S-HSPD
Top	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		2900 114.17" 2200 86.61" 1300 51.18"	1000 39.37" 290 11.42" 170 6.69"	ø1.13 ø0.04"	FU-L51Z Approx. 30g
	15 mm 0.59"								FU-L52Z Approx. 30g
	20 mm 0.79"								FU-L53Z Approx. 30g
Top (Built-in lens)	10 mm 0.39"					3600 141.73" 3600 141.73"	3600 141.73" 2100 82.68" 1100 43.31"	ø3.5 ø0.14"	FU-L50Z Approx. 30g
Side	10 mm 0.39"					2500 98.43" 1800 70.87" 1100 43.31"	840 33.07" 270 10.63" 140 5.51"	ø1.13 ø0.04"	FU-L54Z Approx. 30g


*1 When using the FS-N40 Series. "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

Cylindrical (Set Screw Installation Fibers)

Type	Size	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Optical axis diameter (mm inch)	Model Weight
					TERA (Longest) FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
	ø1.0 ø0.04"		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	800 31.50" 170 6.69"	700 27.56" 510 20.08" 360 14.17"	220 8.66" 64 2.52" 40 1.57"	ø0.5 ø0.02"	FU-58U Approx. 4g
			50 cm 19.69" Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39"	400 15.75" 85 3.35"	380 14.96" 270 10.63" 180 7.09"	120 4.72" 40 1.57" 23 0.91"	ø0.265 ø0.01"	FU-58 Approx. 8g
	ø1.5 ø0.06"		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	800 31.50" 170 6.69"	700 27.56" 510 20.08" 360 14.17"	220 8.66" 64 2.52" 40 1.57"	ø0.5 ø0.02"	FU-59U Approx. 4g
			1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	1500 59.06" 350 13.78"	1200 47.24" 900 35.43" 600 23.62"	440 17.32" 130 5.12" 77 3.03"	ø0.7 ø0.03"	FU-59 Approx. 3g
	ø2.5 ø0.10"		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R10 R0.39"	73 2.87" 16 0.63"	55 2.17" 41 1.61" 27 1.06"	21 0.83" 5 0.20" 2 0.08"	ø0.125 ø0.005"	FU-55 Approx. 3g
			50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)						FU-56 Approx. 3g
	ø3 ø0.12"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	3600 141.73" 1100 43.31"	3600 141.73" 3000 118.11" 1900 74.80"	1400 55.12" 430 16.93" 280 11.02"	ø1.13 ø0.04"	FU-5FZ Approx. 19g
			2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R25 R0.98"	3600 141.73" 1500 59.06"	3600 141.73" 3600 141.73" 2600 102.36"	1900 74.80" 540 21.26" 310 12.20"	ø1 ø0.04"	FU-5F Approx. 19g

*1 When using the FS-N40 Series, "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

Focused Beam/High-Power Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
Beam emitting direction	Aperture angle				 TERA (Longest)  FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Side	Approx. 6°		2 m 6.6' Free-cut (ø1.0 ø0.04") FU-16Z: -40 to +50°C (-40 to +122°F) FU-16/18: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	 3600 141.73"  2300 90.55"	3600 141.73" 3600 141.73" 3600 141.73"	3000 118.11" 1300 51.18" 770 30.31"	ø2.5 ø0.10"	FU-16Z Approx. 8g
					 3600 141.73"  3500 137.80"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 1700 66.93" 1000 39.37"		FU-16 Approx. 8g
	Approx. 2°			R10 R0.39"	 3600 141.73"  2900 114.17"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 1600 62.99" 840 33.07"		FU-18 Approx. 8g
					 3000 118.11"  610 24.02"	2200 86.61" 1500 59.06" 1100 43.31"	900 35.43" 350 13.78" 230 9.06"		FU-18M Approx. 6g
Top	Approx. 6°		2 m 6.6' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	 3600 141.73"  3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2900 114.17" 1400 55.12"	ø2.8 ø0.11"	FU-50 Approx. 8g

*1 When using the FS-N40 Series, "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

Flat Bracket Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Optical axis diameter (mm inch)	Model Weight
Beam emitting direction				TERA (Longest) FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Top		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	950 37.40" 220 8.66"	810 31.89" 570 22.44" 370 14.57"	270 10.63" 90 3.54" 50 1.97"	ø0.5 ø0.02"	FU-51TZ Approx. 5g
		2 m 6.6' Free-cut (ø1.3 ø0.05") -40 to +50°C (-40 to +122°F)		3600 141.73" 1100 43.31"	3600 141.73" 3100 122.05" 1900 74.80"	1400 55.12" 420 16.54" 250 9.84"	ø1 ø0.04"	FU-52TZ Approx. 15g
Side		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)		950 37.40" 220 8.66"	810 31.89" 570 22.44" 370 14.57"	270 10.63" 90 3.54" 50 1.97"	ø0.5 ø0.02"	FU-57TZ Approx. 5g
Flat		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)		740 29.13" 170 6.69"	570 22.44" 400 15.75" 300 11.81"	220 8.66" 86 3.39" 39 1.54"	ø0.5 ø0.02"	FU-53TZ Approx. 10g
		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		3600 141.73" 1100 43.31"	3600 141.73" 2700 106.30" 1800 70.87"	1300 51.18" 400 15.75" 240 9.45"	ø1 ø0.04"	FU-54TZ Approx. 25g
		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		3600 141.73" 750 29.53"	3200 125.98" 2500 98.43" 1500 59.06"	1100 43.31" 400 15.75" 240 9.45"	ø1.13 ø0.04"	FU-56TZ Approx. 20g

*1 When using the FS-N40 Series. "3600 mm 141.73'" is the maximum because the fiber cable length is 2 m 6.6'.

Sleeve Type Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Optical axis diameter (mm inch)	Model Weight
Beam emitting direction				TERA (Longest) FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Side		1 m 3.3' Free-cut (ø1.3 ø0.05") -40 to +70°C (-40 to +158°F)	R25 R0.98"	690 27.17" 140 5.51"	540 21.26" 420 16.54" 280 11.02"	180 7.09" 56 2.20" 32 1.26"	ø0.6 ø0.02"	FU-32 Approx. 5g
		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)		2800 110.24" 610 24.02"	2200 86.61" 1700 66.93" 1100 43.31"	770 30.31" 190 7.48" 120 4.72"	ø1 ø0.04"	FU-34 Approx. 17g
Top		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)		3600 141.73" 1400 55.12"	3600 141.73" 3600 141.73" 2400 94.49"	1800 70.87" 540 21.26" 330 12.99"	ø1 ø0.04"	FU-73 Approx. 24g
		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)	R10 R0.39"	1400 55.12" 310 12.20"	1100 43.31" 850 33.46" 570 22.44"	400 15.75" 120 4.72" 90 3.54"	ø0.5 ø0.02"	FU-75F Approx. 10g
		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)		390 15.35" 85 3.35"	370 14.57" 260 10.24" 180 7.09"	120 4.72" 40 1.57" 20 0.79"	ø0.265 ø0.01"	FU-76F Approx. 10g
		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)		73 2.87" 16 0.63"	55 2.17" 41 1.61" 27 1.06"	21 0.83" 5 0.20" 2 0.08"	ø0.125 ø0.005"	FU-56 Approx. 3g

*1 When using the FS-N40 Series. "3600 mm 141.73'" is the maximum because the fiber cable length is 2 m 6.6'.

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
				TERA (Longest) FINE (Initial)	Other power modes			
Beam emitting direction					MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
	Top		2 m 6.6" Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R40 R1.57"		3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2400 94.49" 1500 59.06"	ø3.7 ø0.15"
		2 m 6.6" Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 1900 74.80"	ø6 ø0.24"	FU-98 Approx. 70g
Side		2 m 6.6" Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R25 ²⁾ R0.98"		3600 141.73" 3600 141.73" 3600 141.73"	3100 122.05" 860 33.86" 570 22.44"	ø2.8 ø0.11"	FU-96 Approx. 71g
		2 m 6.6" Free-cut (ø2.2 ø0.09") 0 to +60°C (0 to +140°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2400 94.49"	ø3.7 ø0.15"	FU-96T Approx. 35g
Side (oil resistant)		2 m 6.6" Free-cut (ø2.2 ø0.09") -20 to +100°C (-4 to +212°F)	R2 R0.08"		3600 141.73" 3600 141.73" 3500 137.80"	2500 98.43" 1000 39.37" 790 31.10"	ø2.3 ø0.09"	FU-80TZ Approx. 30g
		2 m 6.6" Free-cut (ø2.2 ø0.09") -20 to +100°C (-4 to +212°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2900 114.17"	ø4.3 ø0.17"	FU-80MTZ Approx. 55g

*2 Fibers cannot be bent within 25 mm (0.98") of the end of the case screw cap.

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Optical axis diameter (mm inch)	Model Weight
				TERA (Longest) FINE (Initial)	Other power modes			
Size						MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
ø1.0 ø0.04*		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +50°C (-40 to +122°F)	R2 R0.08* ToughFlex High-flex	800 31.50" 170 6.69"	700 27.56" 510 20.08" 360 14.17"	220 8.66" 64 2.52" 40 1.57"	ø0.5 ø0.02* <td> FU-58U Approx. 4g </td>	FU-58U Approx. 4g
		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +50°C (-40 to +122°F)						FU-59U Approx. 4g
		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +50°C (-40 to +122°F)						FU-79U Approx. 4g
M3		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +50°C (-40 to +122°F)	R1 R0.04* ToughFlex High-flex	1800 70.87" 1200 47.24"	1800 70.87" 1800 70.87" 1800 70.87"	1400 55.12" 420 16.54" 240 9.45"	ø2.3 ø0.09* <td> FU-70U Approx. 5g </td>	FU-70U Approx. 5g
		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +50°C (-40 to +122°F)						FU-70U Approx. 5g
M4 Built-in lens		2 m 6.6' Free-cut (ø1.0 ø0.04*) -20 to +50°C (-4 to +122°F)	R4 R0.16* High-flex	3600 141.73" 1200 47.24"	3600 141.73" 3500 137.80" 2100 82.68"	1400 55.12" 410 16.14" 210 8.27"	ø2.3 ø0.09* <td> FU-70TU Approx. 8g </td>	FU-70TU Approx. 8g
		2 m 6.6' Free-cut (ø1.0 ø0.04*) -20 to +50°C (-4 to +122°F)						FU-70TU Approx. 8g
ø1.5 ø0.06*		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +70°C (-40 to +158°F)	R4 R0.16* High-flex	1500 59.06" 350 13.78"	1200 47.24" 900 35.43" 600 23.62"	440 17.32" 130 5.12" 77 3.03"	ø0.7 ø0.03* <td> FU-59 Approx. 3g </td>	FU-59 Approx. 3g
	1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +70°C (-40 to +158°F)	FU-79 Approx. 6g						
	1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +70°C (-40 to +158°F)	FU-57TE Approx. 5g						
6 × 10.5 × 2.5 0.24" × 0.41" × 0.10"		1 m 3.3' Free-cut (ø1.0 ø0.04*) -40 to +70°C (-40 to +158°F)						

23

Heat Resistant Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Optical axis diameter (mm inch)	Model Weight	
Heat resistant temperatures ²				TERA (Longest) FINE (Initial)	Other power modes				
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD			
100°C ³ (212°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +100°C (-40 to +212°F)	R5 R0.20" ToughFlex	 3600 141.73" 1200 47.24" Lens attachment ▶ P25	3600 141.73" 3600 141.73" 2100 82.68"	1500 59.06" 460 18.11" 280 11.02"	ø1 ø0.04"	FU-86ZA Approx. 25g	
105°C ⁴ (221°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +105°C (-40 to +221°F)	R25 R0.98"	 3600 141.73" 1400 55.12" Lens attachment ▶ P25	3600 141.73" 3600 141.73" 2600 102.36"	1900 74.80" 540 21.26" 320 12.60"		FU-86A Approx. 22g	
150°C ⁵ (302°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +150°C (-40 to +302°F)	R20 R0.79"	 3600 141.73" 620 24.41"	3200 125.98" 2100 82.68" 1300 51.18"	860 33.86" 400 15.75" 230 9.06"		ø1.5 ø0.06"	FU-86H Approx. 35g
180°C ⁶ (356°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -60 to +180°C (-76 to +356°F)	R35 R1.38"	 3600 141.73" 680 26.77"	3200 125.98" 2200 86.61" 1400 55.12"	940 37.01" 450 17.72" 260 10.24"			FU-88 Approx. 36g
200°C (392°F)		2m 6.6' Cut not allowed -40 to +200°C (-40 to +392°F)	R8 R0.31"	 2900 114.17"	2100 82.68" 1500 59.06" 1100 43.31"	810 31.89" 300 11.81" 170 6.69"	ø1 ø0.04"	FU-88K Approx. 30g	
300°C (572°F)		2m 6.6' Cut not allowed -40 to +300°C (-40 to +572°F)	R25 R0.98"	 460 18.11" Lens attachment ▶ P25				FU-84C Approx. 66g	

^{*1} When using the FS-N40 Series, "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

^{*2} Use the fiber sensor under dry conditions. Allow some margin for the temperature upper limit when selecting a heat-resistant fiber unit.







^{*3} The recommended maximum ambient temperature during operation is 85°C (185°F) when constantly using the fiber unit in a high-temperature environment.

^{*4} The recommended maximum ambient temperature during operation is 90°C (194°F) when constantly using the fiber unit in a high-temperature environment.

^{*5} The recommended maximum ambient temperature during operation is 130°C (266°F) when constantly using the fiber unit in a high-temperature environment.

^{*6} The recommended maximum ambient temperature during operation is 150°C (302°F) when constantly using the fiber unit in a high-temperature environment.



Area/Array Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Optical axis diameter (mm inch)	Model Weight
Detecting method	Optical axis width				 TERA (Longest)  FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Array	5 mm 0.20"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R4 ^{*2} R0.16"		3600 141.73" 2300 90.56" 1400 55.12"	910 35.83" 340 13.39" 200 7.87"	Approx. 6 × 0.3 0.24" × 0.01"	FU-A05 Approx. 20g
	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)					Approx. 11 × 0.3 0.43" × 0.01"	FU-A10 Approx. 20g
	40 mm 1.57"		2 m 6.6' Free-cut (not including the 50 mm 1.97" spiral section) -20 to +50°C (-4 to +122°F)	R10 R0.39"		3600 141.73" 3200 125.98" 2100 82.68"	1500 59.06" 610 24.02" 350 13.78"	Approx. 40 × 0.25 1.57" × 0.01"	FU-A40 Approx. 70g
	100 mm 3.94"		2 m 6.6' Free-cut (not including the 50 mm 1.97" spiral section) -20 to +50°C (-4 to +122°F)			3600 141.73" 3200 125.98" 2000 78.74"	1400 55.12" 540 21.26" 310 12.20"	Approx. 100 × 0.25 3.94" × 0.01"	FU-A100 Approx. 110g
Area	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		3600 141.73" 3600 141.73" 3600 141.73"	2800 110.24" 1000 39.37" 580 22.83"	10 × 3 0.39" × 0.12" (With 1.0 mm 0.04" wide slit)	FU-12 Approx. 23g
	11 mm 0.43"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2200 86.61" 1200 47.24"	11 × 2 0.43" × 0.08" (With 0.5 mm / 1.0 mm 0.02"/0.04" wide slit)	FU-E11 Approx. 20g
	40 mm 1.57"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	40 × 3 1.57" × 0.12" (0.5 × 20 mm 0.02" × 0.79" / 0.5 × 30 mm 0.02" × 1.18" slit options available)	FU-E40 Approx. 30g

^{*1} When using the FS-N40 Series, "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

^{*2} R10 R0.39" for the first 10 mm 0.39" of cable from the housing.

Detecting Distances Using Thrubeam Lenses

Type	Appearance (mm <i>inch</i>)	Ambient temperature	Model Weight	Applicable fiber units	Detecting distance (mm <i>inch</i>) ^{*1}							
					TERA	MEGA	ULTRA	SUPER	TURBO	FINE	HSPD	S-HSPD
Ultra-long detecting distance Aperture Angle: Approx. 8°	Tip: ø4.3 ø0.17" 	-40 to +70°C (-40 to +158°F)	F-4 Approx. 1g	FU-77TZ/77V/77	3600 141.73"						2700 106.30"	1700 66.93"
				FU-7F	3600 141.73"						3200 125.98"	2000 78.74"
				FU-78	3600 141.73"						2500 98.43"	1400 55.12"
				FU-77G/77TG/77MG/77MTG	1800 70.87"						1700 66.93"	
Long-detecting distance Aperture Angle: Approx. 15°	Tip: ø4 ø0.16" 	-40 to +300°C (-40 to +572°F)	F-2 Approx. 2g	FU-77TZ/77V/77/84C/88K	3600 141.73"						2100 82.68"	1100 43.31"
				FU-7F/86A	3600 141.73"						2500 98.43"	1400 55.12"
				FU-86ZA	3600 141.73"						1900 74.80"	1000 39.37"
				FU-78	3600 141.73"						1600 62.99"	900 35.43"
				FU-77G/77TG/77MG/77MTG	1800 70.87"						1100 43.31"	
Side-view with mounting holes		-40 to +105°C (-40 to +221°F)	F-5 Approx. 10g	FU-77V/77	3600 141.73"						2600 102.36"	1600 62.99"
				FU-7F/86A	3600 141.73"						3100 122.05"	1900 74.80"
				FU-86ZA	3600 141.73"						2900 114.17"	1800 70.87"
				FU-78	3600 141.73"						2300 90.55"	1300 51.18"
				FU-77G/77MG	1800 70.87"						1600 62.99"	
Side-view	Tip: ø4 ø0.16" 	-40 to +70°C ^{*2} (-40 to +158°F)	F-1 Approx. 2g	FU-77V/77	3600 141.73"		3200 125.98"	2200 86.61"	1600 62.99"	530 20.87"	300 11.81"	
				FU-77G/77MG	1800 70.87"				1600 62.99"	530 20.87"	300 11.81"	
				FU-7F/86A	3600 141.73"		2700 106.30"		2300 90.55"	630 24.80"	370 14.57"	
				FU-86ZA	3600 141.73"		2400 94.49"		2000 78.74"	590 23.23"	350 13.78"	
				FU-78/84C/88K	3600 141.73"	3000 118.11"	1900 74.80"	1300 51.18"	960 37.80"	360 14.17"	200 7.87"	

^{*1} The maximum sensing distance of 3600 mm (141.73") (1800 mm 70.87") is possible because the fiber length on one side is 2 m 6.6' (1 m 3.3').

^{*2} When using the F-1 at a temperature of 70°C (158°F) or more, specify the "Heat-resistant F-1".

Slit For FU-E40 (Sold Separately)

Slit Type		With OP-84365 attached	With OP-84366 attached
Optical Axis Size		30 x 0.5 mm 1.18" x 0.02"	20 x 0.5 mm 0.79" x 0.02"
Detecting distance for each power mode (mm inch) ^{*1}	TERA	3600 141.73"	3600 141.73"
	MEGA	3600 141.73"	3600 141.73"
	ULTRA	3500 137.80"	2300 90.55"
	SUPER	1500 59.06"	930 36.61"
	TURBO	760 29.92"	510 20.08"
	FINE	460 18.11"	330 12.99"
	HSPD	160 6.30"	110 4.33"
	S-HSPD	80 3.15"	56 2.20"
Slit weight (transmitter/receiver set)		Approx. 4g	

^{*1} When using the FS-N40 Series, "3600 mm 141.73'" is assumed as the maximum because the fiber cable length is 2 m 6.6'.











OP-84365



OP-84366



Threaded and Hex-Shaped Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Model Weight
Size / Shape	Detecting arrangement				TERA (Longest) FINE (Initial)	Other power modes		
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
M3	Hex- shaped		1 m 3.3' Free-cut (ø1.3 ø0.05" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	 Lens attachment ▶ P28	530 20.87° 390 15.35° 250 9.84°	170 6.69° 45 1.77° 27 1.06°	FU-35TZ Approx. 7g
	Threaded		1 m 3.3' Free-cut (ø1.3 ø0.05" × 2) -40 to +50°C (-40 to +122°F)		 Lens attachment ▶ P28	540 21.26° 420 16.54° 320 12.60°	190 7.48° 47 1.85° 28 1.10°	FU-35FZ Approx. 6g
			1 m 3.3' Free-cut (ø1.3 ø0.05" × 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	 Lens attachment ▶ P28	780 30.71° 600 23.62° 420 16.54°	270 10.63° 76 2.99° 49 1.93°	FU-35FA Approx. 6g
			50 cm 19.69" Cut not allowed FU-21X : -40 to +70°C (-40 to +158°F) FU-24X : -40 to +50°C (-40 to +122°F)		R10 R0.39"	 Lens attachment ▶ P28	220 8.66° 150 5.91° 91 3.58°	68 2.68° 23 0.91° 15 0.59°
M4	Hex- shaped		2 m 6.6' Free-cut (ø1.3 ø0.05" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		750 29.53° 660 25.98° 460 18.11°	370 14.57° 100 3.94° 60 2.36°	FU-66TZ Approx. 10g
	Threaded		2 m 6.6' Free-cut (ø1.3 ø0.05" × 2) FU-66Z : -40 to +50°C (-40 to +122°F) FU-66 : -40 to +70°C (-40 to +158°F)		R25 R0.98"	 	1000 39.37° 750 29.53° 550 21.65° 1100 43.31° 900 35.43° 690 27.17°	430 16.93° 110 4.33° 66 2.60° 550 21.65° 200 7.87° 120 4.72°
M6	Hex- shaped		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		830 32.68° 730 28.74° 670 26.38°	520 20.47° 150 5.91° 89 3.50°	FU-67TZ Approx. 25g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +50°C (-40 to +122°F)	R0.5 R0.02" ToughFlex		1000 39.37° 830 32.68° 610 24.02°	500 19.69° 150 5.91° 88 3.46°	FU-67V Approx. 25g
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		1300 51.18° 1100 43.31° 780 30.71°	640 25.20° 230 9.06° 140 5.51°	FU-61Z Approx. 22g
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +50°C (-40 to +122°F)			1000 39.37° 830 32.68° 610 24.02°	500 19.69° 150 5.91° 88 3.46°	FU-67 Approx. 21g
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"		2200 86.61° 1300 51.18° 1000 39.37°	680 26.77° 270 10.63° 180 7.09°	FU-61 Approx. 21g
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)			1200 47.24° 1000 39.37° 780 30.71°	550 21.65° 220 8.66° 130 5.12°	FU-6F Approx. 21g
	Coaxial		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)			780 30.71° 750 29.53° 680 26.77°	450 17.72° 210 8.27° 120 4.72°	FU-25 Approx. 18g

¹⁾ When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Model Weight
				TERA (Longest) FINE (Initial)	MEGA ULTRA SUPER TURBO HSPD S-HSPD		
ø1.5 ø0.06"		1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	280 11.02" 59 2.32"	250 9.84" 170 6.69" 130 5.12"	91 3.58" 25 0.98" 14 0.55"	FU-49X Approx. 3g
	Sleeve section cannot be bent 	1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R10 R0.39"	64 2.52" 8 0.31"	46 1.81" 30 1.18" 22 0.87"	14 0.55" 3 0.12" 1 0.04"	FU-46 Approx. 2g
ø2 ø0.08"		1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	290 11.42" 59 2.32"	220 8.66" 180 7.09" 110 4.33"	80 3.15" 21 0.83" 12 0.47"	FU-49U Approx. 4g
ø2.5 ø0.10"	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R25 R0.98"	160 6.30" 42 1.65"	120 4.72" 100 3.94" 76 2.99"	54 2.13" 20 0.79" 11 0.43"	FU-22X Approx. 4g
ø3 ø0.12"		2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) FU-4FZ: -40 to +50°C (-40 to +122°F) FU-4F: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	1200 47.24" 340 13.39"	1000 39.37" 750 29.53" 550 21.65"	430 16.93" 110 4.33" 66 2.60"	FU-4FZ Approx. 8g
		1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	290 11.42" 59 2.32"	220 8.66" 180 7.09" 110 4.33"	80 3.15" 21 0.83" 12 0.47"	FU-48U Approx. 4g
		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	500 19.69" 90 3.54"	350 13.78" 270 10.63" 190 7.48"	120 4.72" 32 1.26" 18 0.71"	FU-48 Approx. 7g
		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R25 R0.98"	850 33.46" 330 12.99"	830 32.68" 730 28.74" 660 25.98"	540 21.26" 220 8.66" 180 7.09"	FU-23X Approx. 4g
	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16"	120 4.72" 33 1.30"	100 3.94" 83 3.27" 68 2.68"	46 1.81" 11 0.43" 6 0.24"	FU-45X Approx. 4g

Integrated Bracket Fibers

Type		Appearance (mm <i>inch</i>)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm <i>inch</i>)	Detecting distance (mm <i>inch</i>) ¹			Model Weight
Beam emitting direction	Optical axis height				TERA (Longest) FINE (Initial)	Other power modes		
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Top	10 mm 0.39"	13 0.51" 2 0.08" 17 0.67" 14 0.55" 0.13" 2 m 6.6' Free-cut (ø2.2, ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	1200 47.24" 310 12.20"	1000 39.37" 780 30.71" 580 22.83"	470 18.50" 150 5.91" 90 3.54"	FU-L41Z Approx. 25g	

27

Reflective


Focused Beam/High-Power Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Model Weight
Beam emitting direction	Aperture angle				TERA (Longest) FINE (Initial)	Other power modes		
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Top	Approx. 8°	Thickness: 5.2 0.20" 	2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	30 to 2700 1.18" to 106.3" 30 to 530 1.18" to 20.87"	30 to 2400 1.18" to 94.49" 30 to 2100 1.18" to 82.68" 30 to 1200 1.18" to 47.24"	30 to 690 1.18" to 27.17" 30 to 270 1.18" to 10.63" 30 to 220 1.18" to 8.66"	FU-40 Approx. 23g
		Thickness: 5.2 0.20" 	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel				


*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Small Spot Reflective Fibers

Lens Attachment (Small Spot) + Fiber Unit


Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Lens Attachment		Model	Fiber Unit			
			Appearance (mm inch)	Ambient temperature Weight		Appearance	Minimum bend radius (mm inch)	Model	
Small Spot	Approx. $\phi 0.1$ $\phi 0.004^*$	7 $\pm$ 2 0.28 $\pm$ 0.08 *	 Tip: $\phi 4.3$ $\phi 0.17^*$ 15.6 0.61 *	-30 to +70 $^{\circ}$ C (-22 to +158 $^{\circ}$ F) Approx. 1g	F-2HA		R10 R0.39 *	FU-24X	
						R25 R0.98 *	FU-21X		
						R2 R0.08 * ToughFlex	FU-35FZ		
						R10 R0.39 * Stainless Steel	FU-35FG/2303		
						R25 R0.98 *	FU-35FA		
						R2 R0.08 * ToughFlex	FU-35TZ		
		R10 R0.39 * Stainless Steel	FU-35TG						
	Approx. $\phi 0.4$ $\phi 0.02^*$								
	Small Spot	Approx. $\phi 0.5$ $\phi 0.02^*$	15 $\pm$ 2 0.59 $\pm$ 0.08 *	 Tip: $\phi 7.4$ $\phi 0.29^*$ 27 1.06 *	-30 to +70 $^{\circ}$ C (-22 to +158 $^{\circ}$ F) Approx. 2g	F-4HA		R2 R0.08 * ToughFlex	FU-35FZ
			R10 R0.39 * Stainless Steel	FU-35FG/2303					
			R2 R0.08 * ToughFlex	FU-35TZ					
			R10 R0.39 * Stainless Steel	FU-35TG					
			R25 R0.98 *	FU-35FA					
	Small Spot	Approx. $\phi 1.0$ $\phi 0.04^*$	35 $\pm$ 3 1.38 $\pm$ 0.12 *	 Tip: $\phi 10.6$ $\phi 0.42^*$ 26 1.02 *	-40 to +70 $^{\circ}$ C (-40 to +158 $^{\circ}$ F) Approx. 5g	F-6HA		R25 R0.98 *	FU-21X
							R2 R0.08 * ToughFlex	FU-35FZ	
		R10 R0.39 * Stainless Steel					FU-35FG/2303		
		R2 R0.08 * ToughFlex					FU-35TZ		
		R25 R0.98 *					FU-35FA		

Lens Attachment (Parallel Beam) + Fiber Unit

Type	Beam spot diameter (mm inch)	Lens Attachment			Fiber Unit			Detecting distance (mm inch)*1		
		Appearance (mm inch)	Ambient temperature Weight	Model	Appearance	Minimum bend radius (mm inch)	Model	TERA (Longest) FINE (Initial)	Other power modes MEGA ULTRA SUPER TURBO HSPD S-HSPD	
Parallel Beam Spot	Approx. $\phi 4$ $\phi 0.16$ " (within the detecting range of 0 to 20 mm 0 to 0.79")		-30 to +70°C (-22 to +158°F) Approx. 2g	F-3HA		R2 R0.08" ToughFlex	FU-35FZ	76 2.99"	76 2.99"	68 2.68"
						R10 R0.39" Stainless Steel	FU-35FG/2303	66 2.60"	76 2.99"	32 1.26"
						R25 R0.98"	FU-35FA	100 3.94"	100 3.94"	100 3.94"
						R2 R0.08" ToughFlex	FU-35TZ	68 2.68"	68 2.68"	54 2.13"
						R10 R0.39" Stainless Steel	FU-35TG	50 1.97"	68 2.68"	30 1.18"


*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Lens Attachment (Variable Beam Spot Sizes)



Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Lens Attachment			Fiber Unit		
			Appearance (mm inch)	Ambient temperature Weight	Model	Appearance	Minimum bend radius (mm inch)	Model
Side-view adjustable spot	$\phi 0.5$ to 3 $\phi 0.02$ " to $\phi 0.12$ "	8 to 30 0.31" to $\phi 1.18$ "		-30 to +70°C (-22 to +158°F) Approx. 2g	F-5HA		R2 R0.08" ToughFlex	FU-35FZ
							R10 R0.39" Stainless Steel	FU-35FG/2303
							R25 R0.98"	FU-35FA

F-5HA+FU-35FZ

Target width vs. operating range (Typical)




Built-In Lens Variable Beam Spot


Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Model Weight	Minimum bend radius (mm inch)
Adjustable beam spot	$\phi 0.9$ to 3.5 $\phi 0.04$ " to $\phi 0.14$ "	10 to 30 0.39" to 1.18"		2 m 6.6' Free-cut ($\phi 1.3 \phi 0.05$ " x 2) -40 to +70°C (-40 to +158°F)	FU-10 Approx. 5g	R25 R0.98"
				2 m 6.6' Cut not allowed -40 to +70°C (-40 to +158°F)	FU-2540 Approx. 30g	R25 R0.98"

FU-10

Adjustable range of spot diameter (Typical)



Ultra-Small Beam Spot

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Model Weight	Minimum bend radius (mm inch)
Small Spot	Approx. $\phi 0.1 \phi 0.004$ "	5 0.20"		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	FU-20 Approx. 2g	R25 R0.98"

* Cannot be used with the FS-N40 Series in S-HSPD/HSPD mode.

Reflective

Definite-Reflective Fibers

Type				Detecting distance (mm inch) ^{*1}					
Beam emitting direction	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	TERA (Longest) FINE (Initial)	Other power modes		Beam spot diameter (mm inch)	Model Weight	
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD			
Top		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	15 to 150 0.59" to 5.91" 15 to 55 0.59" to 2.17"	15 to 110 0.59" to 4.33" 15 to 100 0.59" to 3.94" 15 to 76 0.59" to 2.99"	15 to 64 0.59" to 2.52" 15 to 39 0.59" to 1.54" 15 to 27 0.59" to 1.06"	—	FU-40S Approx. 25g	
Side		2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) -40 to +70°C (-40 to +158°F)	R10 R0.39"	3 0.12" center of detecting distance 3 0.12" center of detecting distance 3 0.12" center of detecting distance	3 0.12" center of detecting distance 3 0.12" center of detecting distance 3 0.12" center of detecting distance	3 0.12" center of detecting distance 3 0.12" center of detecting distance 3 0.12" center of detecting distance	Approx. 4.5 0.18" Approx. 3.5 0.14" (At distance of 3 0.12")	FU-37 Approx. 6g	
		2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) -40 to +70°C (-40 to +158°F)		6 0.24" center of detecting distance 6 0.24" center of detecting distance 6 0.24" center of detecting distance	6 0.24" center of detecting distance 6 0.24" center of detecting distance 6 0.24" center of detecting distance	6 0.24" center of detecting distance 6 0.24" center of detecting distance 6 0.24" center of detecting distance	Approx. ø1.5 ø0.06" (At distance of 6 0.24")	FU-38 Approx. 5g	
Flat		2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	0 to 4 0" to 0.16" 0 to 4 0" to 0.16"	0 to 4 0" to 0.16" 0 to 4 0" to 0.16" 0 to 4 0" to 0.16"	0 to 4 0" to 0.16" 0 to 4 0" to 0.16" 0 to 4 0" to 0.16"	—	FU-38V Approx. 5g	
		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +60°C (-40 to +140°F)		8 to 89 0.31" to 3.50" 8 to 54 0.31" to 2.13"	8 to 64 0.31" to 2.52" 8 to 61 0.31" to 2.40" 8 to 59 0.31" to 2.32"	8 to 57 0.31" to 2.24" 8 to 36 0.31" to 1.42" 10 to 26 0.39" to 1.02"	—	FU-38L Approx. 20g	
		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)		R5 R0.20"	0 to 25 0" to 0.98" 0 to 25 0" to 0.98"	0 to 25 0" to 0.98" 0 to 25 0" to 0.98" 0 to 25 0" to 0.98"	0 to 25 0" to 0.98" 0 to 25 0" to 0.98" 0 to 25 0" to 0.98"	—	FU-38S Approx. 20g
		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)		R25 R0.98"	0 to 14 0" to 0.55" 0 to 14 0" to 0.55"	0 to 14 0" to 0.55" 0 to 14 0" to 0.55" 0 to 14 0" to 0.55"	0 to 14 0" to 0.55" 0 to 14 0" to 0.55" 0 to 14 0" to 0.55"	—	FU-38R Approx. 20g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Flat Bracket Fibers








Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}				Model Weight
Beam emitting direction					■ TERA (Longest) ■ FINE (Initial)	Other power modes			
						MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Top			1 m 3.3' Free-cut (ø1.0 ø0.04" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	■ 1 to 370 0.04" to 14.57" ■ 1 to 66 0.04" to 2.60"	1 to 270 0.04" to 10.63" 1 to 200 0.04" to 7.87" 1 to 130 0.04" to 5.12"	1 to 100 0.04" to 3.94" 1 to 22 0.04" to 0.87" 1 to 10 0.04" to 0.39"	FU-44TZ Approx. 3g	
Side			1 m 3.3' Free-cut (ø1.0 ø0.04" × 2) -40 to +50°C (-40 to +122°F)		■ 1 to 370 0.04" to 14.57" ■ 1 to 66 0.04" to 2.60"	1 to 270 0.04" to 10.63" 1 to 200 0.04" to 7.87" 1 to 130 0.04" to 5.12"	1 to 100 0.04" to 3.94" 1 to 22 0.04" to 0.87" 1 to 10 0.04" to 0.39"	FU-47TZ Approx. 4g	
Flat			1 m 3.3' Free-cut (ø1.0 ø0.04" × 2) -40 to +50°C (-40 to +122°F)		■ 2 to 180 0.08" to 7.09" ■ 2 to 42 0.08" to 1.65"	2 to 150 0.08" to 5.91" 2 to 110 0.08" to 4.33" 2 to 74 0.08" to 2.91"	2 to 52 0.08" to 2.05" 2 to 13 0.08" to 0.51" 2 to 4 0.08" to 0.16"	FU-41TZ Approx. 5g	
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +50°C (-40 to +122°F)		■ 1 to 1000 0.04" to 39.37" ■ 1 to 120 0.04" to 4.72"	1 to 820 0.04" to 32.28" 1 to 540 0.04" to 21.26" 1 to 320 0.04" to 12.87"	1 to 220 0.04" to 8.66" 1 to 85 0.04" to 3.35" 1 to 79 0.04" to 3.11"	FU-42TZ Approx. 24g	
			2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +50°C (-40 to +122°F)		■ 1 to 1000 0.04" to 39.37" ■ 1 to 120 0.04" to 4.72"	1 to 820 0.04" to 32.28" 1 to 540 0.04" to 21.26" 1 to 320 0.04" to 12.87"	1 to 220 0.04" to 8.66" 1 to 85 0.04" to 3.35" 1 to 79 0.04" to 3.11"	FU-43TZ Approx. 22g	

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Sleeve Type Fibers





Type	Appearance (mm <i>inch</i>)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm <i>inch</i>)	Detecting distance (mm <i>inch</i>) ^{*1}				Model Weight
Beam emitting direction				TERA (Longest) FINE (Initial)	Other power modes			
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Side	Sleeve section cannot be bent	2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) -40 to +70°C (-40 to +158°F)	R10 R0.39"	340 13.39" 59 2.32"	290 11.42" 220 8.66" 130 5.12"	85 3.35" 22 0.87" 12 0.47"	FU-31 Approx. 5g	
	Min. bend radius of sleeve: R25 R0.98"	1 m 3.3' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	750 29.53" 83 3.27"	540 21.26" 420 16.54" 230 9.06"	150 5.91" 54 2.13" 31 1.22"	FU-33 Approx. 10g	

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) [*]			Model Weight
Beam emitting direction				TERA (Longest) FINE (Initial)	Other power modes		
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Top	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16"	150 5.91" 33 1.30"	110 4.33" 92 3.62" 68 2.68"	46 1.81" 13 0.51" 7 0.28"	FU-65X Approx. 5g
	Min. bend radius of sleeve: R10 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	580 22.83" 90 3.54"	420 16.54" 280 11.02" 170 6.69"	120 4.72" 29 1.14" 17 0.67"	FU-63Z Approx. 10g
	Min. bend radius of sleeve: R10 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	640 25.20" 130 5.12"	500 19.69" 390 15.35" 250 9.84"	170 6.69" 50 1.97" 30 1.18"	FU-63 Approx. 10g
	Min. bend radius of sleeve: R10 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)					FU-63T Approx. 10g
	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16"	120 4.72" 33 1.30"	100 3.94" 83 3.27" 68 2.68"	46 1.81" 11 0.43" 6 0.24"	FU-45X Approx. 4g
	Sleeve section cannot be bent 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	640 25.20" 130 5.12"	500 19.69" 390 15.35" 250 9.84"	170 6.69" 50 1.97" 30 1.18"	FU-43 Approx. 8g
	Sleeve section cannot be bent 	1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R10 R0.39"	64 2.52" 8 0.31"	46 1.81" 30 1.18" 22 0.87"	14 0.55" 3 0.12" 1 0.04"	FU-46 Approx. 2g
Coaxial, narrow beam 10°	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R25 R0.98"	160 6.30" 42 1.65"	120 4.72" 100 3.94" 76 2.99"	54 2.13" 20 0.79" 11 0.43"	FU-22X Approx. 4g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

High-Flex Fibers (Repeated Bending Fibers)

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Model Weight
Size				TERA (Longest) FINE (Initial)	Other power modes		
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
ø2 ø0.08"		1 m 3.3' Free-cut (ø1.0 ø0.04" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	290 11.42" 59 2.32"	220 8.66" 180 7.09" 110 4.33"	80 3.15" 21 0.83" 12 0.47"	FU-49U Approx. 4g
ø3 ø0.12"		1 m 3.3' Free-cut (ø1.0 ø0.04" × 2) -40 to +50°C (-40 to +122°F)					FU-48U Approx. 4g
M3		1 m 3.3' Free-cut (ø1.0 ø0.04" × 2) -40 to +50°C (-40 to +122°F)					FU-69U Approx. 4g
ø1.5 ø0.06"		1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	280 11.02" 59 2.32"	250 9.84" 170 6.69" 130 5.12"	91 3.58" 25 0.98" 14 0.55"	FU-49X Approx. 3g
M3		1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)					FU-69X Approx. 3g
ø3 ø0.12"		2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) -40 to +70°C (-40 to +158°F)					FU-48 Approx. 7g
M4		2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) -40 to +70°C (-40 to +158°F)					FU-68 Approx. 8g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)






Reflective

Oil/Chemical Resistant Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹		Standard target to be detected	Model Weight
Beam emitting direction				TERA (Longest) FINE (Initial)	MEGA ULTRA SUPER TURBO HSPD S-HSPD		
Top		2 m 6.6' Free-cut (ø1.3 ø0.05" × 2) -40 to +70°C (-40 to +158°F)	R40 R1.57"	310 12.20" 200 7.87"	310 12.20" 290 11.42" 250 9.84"	210 8.27" 130 5.12" 95 3.74"	—
		2 m 6.6' Free-cut (ø1.3 ø0.05" × 2) -40 to +60°C (-40 to +140°F)		8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79"	200 × 200 mm 7.67" × 7.87" t = 0.7 mm 0.03" Glass substrate
		2 m 6.6' Free-cut (ø1.3 ø0.05" × 2) -40 to +85°C (-40 to +185°F)		8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79" 8 to 20 0.31" to 0.79"	FU-91 Approx. 32g

¹ When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Heat Resistant Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight
Heat resistant temperatures ²				TERA (Longest) FINE (Initial)	Other power modes		
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
100°C ³ (212°F)		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +100°C (-40 to +212°F)	R5 R0.20" ToughFlex	900 35.43" 290 11.42"	810 31.89" 700 27.56" 520 20.47"	430 16.93" 150 5.91" 86 3.39"	FU-85ZA Approx. 25g
105°C ⁴ (221°F)		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +105°C (-40 to +221°F)	R25 R0.98"	1200 47.24" 420 16.54"	1100 43.31" 860 33.86" 630 24.80"	530 20.87" 210 8.27" 130 5.12"	FU-85A Approx. 21g
150°C ⁵ (302°F)		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +150°C (-40 to +302°F)	R20 R0.79"	1100 43.31" 290 11.42"	950 37.40" 870 34.25" 650 25.59"	540 21.26" 150 5.91" 90 3.54"	FU-85H Approx. 35g
180°C ⁶ (356°F)		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -60 to +180°C (-76 to +356°F)	R35 R1.38"	1200 47.24" 370 14.57"	1000 39.37" 890 35.04" 670 26.38"	560 22.05" 170 6.69" 100 3.94"	FU-87 Approx. 33g
200°C (392°F)		1 m 3.3' Cut not allowed -40 to +200°C (-40 to +392°F)	R8 R0.31"	790 31.10" 350 13.78"	770 30.31" 670 26.38" 600 23.62"	500 19.69" 170 6.69" 100 3.94"	FU-87K Approx. 15g
300°C (572°F)		1 m 3.3' Cut not allowed -40 to +300°C (-40 to +572°F)	R25 R0.98"				FU-82C Approx. 29g
		1 m 3.3' Cut not allowed -40 to +300°C (-40 to +572°F)					FU-83C Approx. 23g
350°C (662°F)		1 m 3.3' Cut not allowed -30 to +350°C (-22 to +662°F)		670 26.38" 250 9.84"	650 25.59" 590 23.23" 550 21.65"	470 18.50" 140 5.51" 90 3.54"	FU-81C Approx. 24g
250°C (482°F)		2 m 6.6' Cut not allowed -40 to +250°C (-40 to +482°F)	R25 R0.98"	8 to 86 0.31" to 3.39" 8 to 51 0.31" to 2.01"	8 to 62 0.31" to 2.44" 8 to 57 0.31" to 2.24" 8 to 54 0.31" to 2.13"	8 to 51 0.31" to 2.01" 8 to 30 0.31" to 1.18" 9 to 23 0.35" to 0.91"	FU-38LK Approx. 70g
		1 m 3.3' Cut not allowed -40 to +250°C (-40 to +482°F)					2.5 to 150 0.10" to 5.91" 2.5 to 27 0.10" to 1.06"
180°C ⁶ (356°F)		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +180°C (-40 to +356°F)	R35 R1.38"				FU-38H Approx. 45g

¹ When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

² Use the fiber sensor under dry conditions. Allow some margin for the temperature upper limit when selecting a heat-resistant fiber unit.




³ The recommended maximum ambient temperature during operation is 85°C (185°F) when constantly using the fiber unit in a high-temperature environment.

⁴ The recommended maximum ambient temperature during operation is 90°C (194°F) when constantly using the fiber unit in a high-temperature environment.

⁵ The recommended maximum ambient temperature during operation is 130°C (266°F) when constantly using the fiber unit in a high-temperature environment.

⁶ The recommended maximum ambient temperature during operation is 150°C (302°F) when constantly using the fiber unit in a high-temperature environment.

Area/Array Fibers


Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Model Weight
Detecting method	Optical axis width				TERA (Longest) FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Array	10 mm 0.39" (at distance of 4mm 0.16")		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R4 ² R0.16"	 1200 47.24" 250 9.84"	1100 43.31" 780 30.71" 440 17.32"	300 11.81" 100 3.94" 58 2.28"	FU-A05D Approx. 20g
	15 mm 0.59" (at distance of 4mm 0.16")		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)					FU-A10D Approx. 20g
Area	15 mm 0.59" (at distance of 15mm 0.59")		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	5 to 210 0.20" to 8.27" 5 to 210 0.20" to 8.27"	5 to 210 0.20" to 8.27" 5 to 210 0.20" to 8.27" 5 to 210 0.20" to 8.27"	5 to 210 0.20" to 8.27" 5 to 160 0.20" to 6.30" 5 to 110 0.20" to 4.33"	FU-11 Approx. 19g

^{*1} When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.) ^{*2} R10 R0.39" for the first 10 mm 0.39" of cable from the housing.

Liquid-Level Fibers

Type			Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Accessories	Model Weight
Detecting method	Transparent tube diameter (mm inch)	Beam axes					
Tube-mountable	ø4 to 26 ø0.16" to 1.02"	16		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R5 R0.20"	Binding band × 2 Nonslip rubber × 2	FU-95S Approx. 23g
		1		2 m 6.6' Free-cut (ø1.0 ø0.04" × 2) FU-95Z: -40 to +50°C (-40 to +122°F) FU-95HA: -40 to +105°C (-40 to +221°F) FU-95: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex R10 R0.39" R10 R0.39"	Binding band × 2 Nonslip rubber × 2 Spacer × 2 Screw × 2 Nut × 2	FU-95Z Approx. 7g FU-95HA Approx. 7g FU-95 Approx. 7g
				2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R5 R0.20"	—	FU-95W Approx. 20g
	More than ø26 1.02" recommended	16		2 m 6.6' Free-cut (ø2.2 ø0.09" × 2) -40 to +70°C (-40 to +158°F)	R5 R0.20"	—	FU-95W Approx. 20g

* The recommended maximum ambient temperature during operation is 90°C (194°F) when constantly using the fiber unit in a high-temperature environment.

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)		Model Weight
Detecting method			PFA-sheathed section	Fiber	
Immersion		2 m 6.6' Free-cut (ø1.3 ø0.05" × 2) FU-93Z: -40 to +50°C (-40 to +122°F) FU-93: -40 to +70°C (-40 to +158°F)	R40" R1.57"	R0.5 R0.02" ToughFlex	FU-93Z Approx. 78g
				R25 R0.98"	FU-93 Approx. 78g



* Not bendable up to 80 mm 3.15" from the tip.

Helpful Usage Tips

- Use the timer function on the fiber optic amplifier if chattering occurs due to dripping or bubbles in the liquid.
- Do not pull or push the fiber unit. 30N every three seconds maximum for the FU-93 Series, and 10N every three seconds maximum for the FU-95 Series.
- Stable detection may not be possible in the following cases (FU-93 Series):
If a bubble adheres to the tip of the sensor;
If foreign material adheres to the tip of the sensor;
When detecting highly adhesive liquid;
When detecting high temperature liquids such as strong acid or strong alkali (Liquid with PFA mixed or penetrated, or fluorinated acid.); and
opalescent liquid or liquid that colors PFA.
- A tube whose wall thickness is 3 mm 0.12" or greater may make detection difficult. (FU-95 Series)
- FU-95 Series cannot be used for opaque tubes.
- Use the Display Scaling function of the FS-N40/N10 Series to adjust the displayed light intensity.
- With the FU-93/93Z, the sensor and PFA case are inserted into a thermo fitted tube 80 mm 3.15", up to the tip, in order to secure them in place. Take care to avoid cutting this tube, which will result in looseness.

Retro-Reflective

Retro-Reflective Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*			Model Weight
Beam emitting direction				TERA (Longest) FINE (Initial)	Other power modes		
					MEGA ULTRA SUPER	TURBO HSPD S+HSPD	
M6	 17 0.67" Reflective tape (accessory)	2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	30 to 1100 1.18" to 43.31" 30 to 220 1.18" to 8.66"	30 to 1000 1.18" to 39.37" 30 to 810 1.18" to 31.89" 30 to 550 1.18" to 21.65"	30 to 380 1.18" to 14.96" —	FU-13 Approx. 8g
Square type	 26.9 1.06" 20.8 0.82" Thickness: 12.6 0.50" Reflector: R-2 (accessory)	2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -20 to +55°C (-4 to +131°F)	R10 R0.39"	100 to 14000 3.94" to 551.18" 100 to 200 3.94" to 91.55"	100 to 10000 3.94" to 393.70" 100 to 8500 3.94" to 334.65" 100 to 4200 3.94" to 165.35"	100 to 2800 3.94" to 110.24" 100 to 1700 3.94" to 66.93" 100 to 1200 3.94" to 47.24"	FU-15 Approx. 12g

*1 When using the FS-N40 Series.

Reflector/Reflective Tape Specifications (Optional Parts)



Type	Power modes	R-2 (OP-95388)  51.2 x 61 mm 2.02" x 2.40"	R-3 (OP-96436)  35 x 42 mm 1.38" x 1.65"	R-5  14 x 36 mm 0.55" x 1.42"	Reflective tape (OP-96629)  40 x 30 mm 1.57" x 1.18"
FU-13	TERA (mm inch)	10 to 2200 0.39" to 86.61"	10 to 1800 0.39" to 70.87"	10 to 1200 0.39" to 47.24"	30 to 1100 1.18" to 43.31"
	MEGA (mm inch)	10 to 2000 0.39" to 78.74"	10 to 1700 0.39" to 66.93"	10 to 1100 0.39" to 43.31"	30 to 1000 1.18" to 39.37"
	ULTRA (mm inch)	10 to 1600 0.39" to 62.99"	10 to 1300 0.39" to 51.18"	10 to 910 0.39" to 35.83"	30 to 810 1.18" to 31.89"
	SUPER (mm inch)	10 to 1100 0.39" to 43.31"	10 to 920 0.39" to 36.22"	10 to 630 0.39" to 24.80"	30 to 550 1.18" to 21.65"
	TURBO (mm inch)	10 to 760 0.39" to 29.92"	10 to 600 0.39" to 23.62"	10 to 380 0.39" to 14.96"	30 to 380 1.18" to 14.96"
	FINE (mm inch)	10 to 460 0.39" to 18.11"	10 to 360 0.39" to 14.17"	10 to 230 0.39" to 9.06"	30 to 220 1.18" to 8.66"
	HSPD (mm inch)	10 to 250 0.39" to 9.84"	10 to 200 0.39" to 7.87"	10 to 120 0.39" to 4.72"	—
	S-HSPD (mm inch)	10 to 230 0.39" to 9.06"	10 to 180 0.39" to 7.09"	—	—
FU-15	TERA (mm inch)	100 to 14000 3.94" to 551.18"	100 to 9500 3.94" to 374.02"	100 to 4400 3.94" to 173.23"	Reflective tape cannot be used.
	MEGA (mm inch)	100 to 10000 3.94" to 393.70"	100 to 6800 3.94" to 267.72"	100 to 4000 3.94" to 157.48"	
	ULTRA (mm inch)	100 to 8500 3.94" to 334.65"	100 to 6100 3.94" to 240.16"	100 to 3700 3.94" to 145.67"	
	SUPER (mm inch)	100 to 4200 3.94" to 165.35"	100 to 3300 3.94" to 129.92"	100 to 2400 3.94" to 94.49"	
	TURBO (mm inch)	100 to 2800 3.94" to 110.24"	100 to 2200 3.94" to 86.61"	100 to 1900 3.94" to 74.80"	
	FINE (mm inch)	100 to 2300 3.94" to 90.55"	100 to 1800 3.94" to 70.87"	100 to 1800 3.94" to 70.87"	
	HSPD (mm inch)	100 to 1700 3.94" to 66.93"	100 to 1200 3.94" to 47.24"	100 to 1200 3.94" to 47.24"	
	S-HSPD (mm inch)	100 to 1200 3.94" to 47.24"	100 to 920 3.94" to 36.22"	100 to 920 3.94" to 36.22"	

Fiber Unit Adapter Options

Fibers with a cable diameter of 1.0 mm 0.04" or 1.3 mm 0.05" come with an adapter to connect to the fiber amplifier. If you lose the adapter, purchase the appropriate adapter listed here.

Appearance	Cable diameter	Adaptor
	ø1.3 ø0.05"	Adaptor A (OP-26500)
	ø1.0 ø0.04"	Adaptor B (OP-26501)

Vacuum Environment Type Fibers

Type			Appearance (mm inch)	Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Model Weight
Detecting Dimensions method	Description	Heat resistant temperatures				TERA (Longest) FINE (Initial)	Other power modes		
							MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Thrubeam	Vacuum side	350°C (662°F)		1 m 3.3' Cut not allowed -40 to +350°C (-40 to +662°F)	R25 R0.98"		1800 70.87" 1200 47.24" 850 33.46"	610 24.02" 210 8.27" 110 4.33"	FU-V84 Approx. 55g
		350°C (662°F)		1 m 3.3' Cut not allowed -40 to +350°C (-40 to +662°F)					FU-V84L Approx. 60g
	Air side	70°C (158°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)					FU-V7FN Approx. 30g

*1 When using the FS-N40 Series.

Type		Appearance (mm inch)	Ambient temperature	Material	Accessories	Model Weight
Description	Heat resistant temperatures					
Optical integrator for thrubeam set	200°C (392°F)		-10 to +200°C (14 to +392°F)	Fiber: Multi-component glass	M5nut, spring washer, washer two (2) each O-ring (2): Fluoro-rubber (JIS Type 4D)	FU-VJ1 Approx. 25g

Type		Appearance (mm inch)	Ambient temperature	Applicable fiber units	Detecting distance (mm inch) ^{*2}								Model Weight
Description	Heat resistant temperatures				TERA	MEGA	ULTRA	SUPER	TURBO	FINE	HSPD	S-HSPD	
Vacuum long-distance lens	350°C (662°F)	End ø4 ø0.16" 7.7 0.30"	-10 to +350°C (14 to +662°F)	FU-V84 FU-V84L	5600 220.47"	5600 220.47"	5600 220.47"	4400 173.23"	3000 118.11"	2200 86.61"	1000 39.37"	740 29.13"	F-V2 Approx. 2g


*2 When using the FS-N40 Series.

Type		Appearance (mm inch)	Ambient temperature	Features	Accessories	Model Weight
Description	Heat resistant temperatures					
2 channel chamber flange	200°C (392°F)		-10 to +200°C (14 to +392°F)	With this part, two sets of optical integrators (four optical integrators in total) can be connected to the four through holes. This part has an outer diameter of 70 mm 2.76" and is sealed with a V40 O-ring. For details on the shape, see "Dimensions."	O-ring (1) Material: Fluoro-rubber (JIS Type 4D)	FU-VJ2 Approx. 280g

Attaching the Optical Integrator

An optical integrator can be used to seal the vacuum side and air side and transmit light between the vacuum-side fiber and the air-side fiber. Optical integrators undergo leak testing prior to shipping. (Leak testing in which the leak amount is 1×10^{-10} Pa·m³/sec or less)

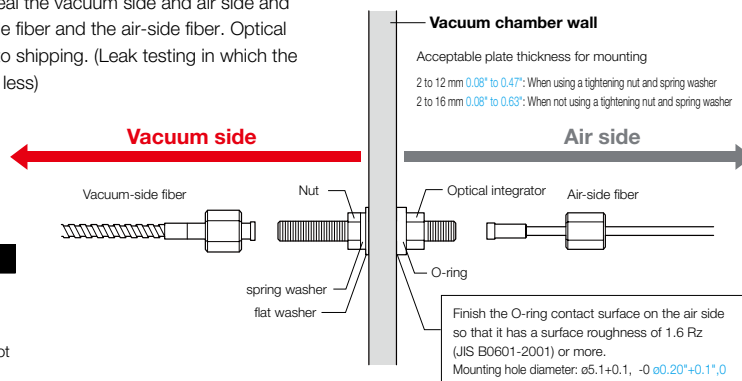PRECAUTIONS
Be careful when breaking the seal as the vacuum side fiber and optical coupler are placed in a package containing deaerator after being cleaned with alcohol. They are not baked after cleaning, so bake before use.



Specifications

■ Amplifier Units

Model		NPN output	FS-N41N	FS-N42N	FS-N43N	FS-N44N	FS-N41C ^{*1}	FS-N40
		PNP output	FS-N41P	FS-N42P	FS-N43P	FS-N44P	(Selectable output)	
Cable/connector			Cable				M8 Connector ^{*2}	–
Main unit/expansion unit			Main unit	Expansion unit	Main unit	Expansion unit	Main unit	Expansion unit
Number of control outputs			1	1	2	2	2 ^{*3}	None ^{*4}
Number of external inputs			–	–	1	1	1 ^{*3}	–
Light source LED			Transmitter side: Red, four-element LED (wavelength: 660 nm)					
Response time			23 μs (S-HSPD ^{*5})/50 μs (HSPD ^{*6})/250 μs (FINE)/500 μs (TURBO)/ 1 ms (SUPER)/4 ms (ULTRA)/16 ms (MEGA)/64 ms (TERA)					
Control output			Open-collector, 30 V or less 100 mA or less per output, 100 mA or less total for 2 outputs (when used as a solitary unit) / 20 mA or less (when used as an expansion unit)					–
		Residual voltage	NPN 1.4 V or less (output current: 10 mA or less) / 2 V or less (output current: 10 to 100 mA) PNP 1.6 V or less (output current: 10 mA or less) / 2.2 V or less (output current: 10 to 100 mA)					–
External input			Input time: 2 ms (ON) / 20 ms (OFF) or longer ^{*7}					
Unit expansion (excluding the FS-N41C)			Up to 16 units (17 units connected in total including the main unit). However, each dual output type will be treated as two expansion units.					
Protection circuit			Protection against reverse power connection, output overcurrent, output surge, and reverse output connection					
Mutual interference prevention			S-HSPD / HSPD: 0 units, FINE: 4 units, TURBO / SUPER / ULTRA / MEGA / TERA: 8 units (The mutual interference prevention values are twice those shown here when Double is set.)					
Power supply	Power supply voltage		10 to 30 VDC (including 10% ripple (P-P) or less), class 2 or LPS ^{*8}					
	Power consumption ^{*9}	NPN FS-N40	During normal operation: 870 mW or less (34 mA or less at 24 V / 62 mA or less at 12 V) ECO ON: 800 mW or less (31 mA or less at 24 V / 56 mA or less at 12 V) ECO FULL: 710 mW or less (28 mA or less at 24 V / 49 mA or less at 12 V)					
		PNP FS-N41C	Single output type (FS-N41P / N42P) and FS-N41C During normal operation: 910 mW or less (36 mA or less at 24 V / 65 mA or less at 12 V) ECO ON: 840 mW or less (33 mA or less at 24 V / 60 mA or less at 12 V) ECO FULL: 750 mW or less (30 mA or less at 24 V / 52 mA or less at 12 V)					
			Dual output type (FS-N43P / N44P) During normal operation: 990 mW or less (39 mA or less at 24 V / 72 mA or less at 12 V) ECO ON: 920 mW or less (36 mA or less at 24 V / 66 mA or less at 12 V) ECO FULL: 830 mW or less (33 mA or less at 24 V / 59 mA or less at 12 V)					
Ambient light			Incandescent lamp: 20,000 lx or less, sunlight: 30,000 lx or less					
Ambient temperature			-20°C -4°F to +55°C +131°F (no freezing) ^{*10}					
Vibration resistance			10 to 55 Hz; double amplitude 1.5 mm 0.06"; 2 hours each for X, Y, and Z axes					
Shock resistance			500 m / s ² ; 3 times each for X, Y, and Z axes					
Case material			Main unit and cover: polycarbonate					
Weight			Approx. 78 g	Approx. 48 g	Approx. 83 g	Approx. 73 g	Approx. 25 g	Approx. 23 g

*1 IO-Link Specification V1.1/COM2 (38.4 kbps) is supported.

*2 Ensure the cable length is 30 m 98.4' or less for the M8 connector type. Ensure the cable length is 20 meters 65.6' or less when connecting by way of IO-Link.

*3 Output 2 and the external input are selectable.

*4 This counts as 1 output when connecting multiple units to the FS-MC8N/P, NU Series.

*5 Restrictions when S-HSPD is selected

- Output 2 of dual output types (FS-N43N / N43P / N44N / N44P / N41C) is fixed to OFF.
- IO-Link communication (FS-N41C) cannot be used.
- Area detection, Area % Mode, DATUM, Rising edge, and Falling edge cannot be selected for Detection Mode.
- Output timer, Limit Detection, and Display Gain cannot be used.
- FULL cannot be selected for the ECO function.

*6 Restrictions when HSPD is selected

- Display Gain cannot be used.

*7 The input time becomes 25 ms (ON)/25 ms (OFF) when external calibration input is selected.

*8 When expanding the system to 9 or more units, use a power supply voltage of 12 V or higher.

*9 The load current is excluded. The power consumption including the load when the maximum number of units are connected is 38 W max.

*10 When expanded by 1 to 2 units: -20°C -4°F to +55°C +131°F. When expanded by 3 to 10 units: -20°C -4°F to +50°C +122°F.

When expanded by 11 to 16 units: -20°C -4°F to +45°C +113°F. When using 2 outputs, 1 unit is counted as 2 units.

The prescribed values for the ambient temperature assume that the sensor amplifier has been mounted on a DIN rail installed on a metal surface.

Exercise special care when installing the product in an airtight space.

Multi-Output Unit

Model	FS-MC8N	
	NPN output	FS-MC8P
Number of inputs and outputs	Separate control outputs: 8, common output: 1, common input: 1	
Response time	Depends on the response time settings of the connected expansion units	
Unit expansion	Up to 8 expansion units can be connected. (However, each dual output type will be treated as 2 expansion units.) Allowable passing current: 1200 mA or less	
Indicators	STATUS indicator (green and red two-color display) MEMORY indicator (orange) LOCK indicator (orange)	
Separate control output, common output	NPN output	NPN open-collector, 30 V or less, 20 mA or less per output, residual voltage: 1.4 V or less
	PNP output	PNP open-collector, 30 V or less, 20 mA or less per output, residual voltage: 1.6 V or less
External input time	Input time of the connected expansion units +11 ms	
Protection circuit	Protection against reverse power connection, reverse output connection, output overcurrent, and output surge	
Power supply	Power supply voltage ^{*1}	10 to 30 VDC (including 10% ripple (P-P) or less), class 2 or LPS
	Power consumption ^{*2}	690 mW or less (when used as a solitary unit) (26 mA or less at 24 V/38 mA or less at 12 V [excluding the load current])
Environmental resistance	Ambient temperature	-20°C -4°F to +55°C +131°F (no freezing)
	Vibration resistance	10 to 55 Hz; double amplitude 1.5 mm 0.06"; 2 hours each for X, Y, and Z axes
	Shock resistance	500 m/s ² ; 3 times each for X, Y, and Z axes
Case material	Main unit and cover: polycarbonate	
Weight	Approx. 110 g	


*1 Match the rated power supply voltage of the expansion units to be connected to the system.

*2 The power consumption including the load when the maximum number of units are connected is 38 W max.

I/O Circuit Diagrams


Amplifier Units (Cable Type)

FS-N41N/N42N




*FS-N41N only

FS-N41P/N42P




*FS-N41P only

FS-N43N/N44N



*FS-N43N only


FS-N43P/N44P



*FS-N43P only


Amplifier Unit (M8 Connector Type FS-N41C)

Select PNP or NPN and the function of I/O pin (2) during the initial settings.




When using the sensor in PNP mode

[OUT1 + OUT2 selected]




[OUT1 + INPUT selected]




When using the sensor in NPN mode

[OUT1 + OUT2 selected]




[OUT1 + INPUT selected]




The wire colors indicate the colors when using an OP-73864/73865 M8 connector cable (sold separately).

Multi-Output Unit

FS-MC8N



FS-MC8P




* Black, white, orange, yellow, green, purple, gray, pink / purple



FS-N41N/N41P/N43N/N43P Main Unit (Cable Type)

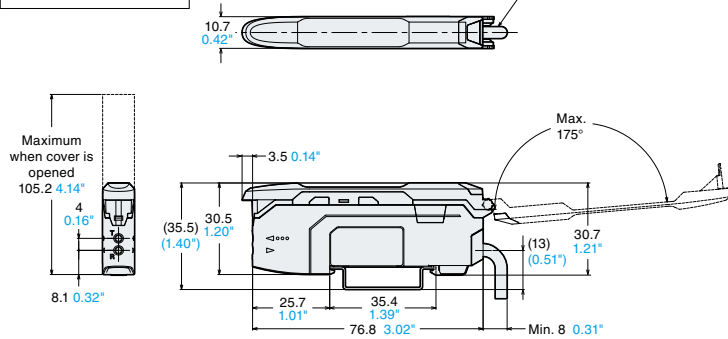ø3.9 ø0.15" 3-core x brown/blue/black 0.34 mm² 0.000527^{±2} *
Cord length 2 m 6.56'




* FS-N43N/N43P is ø3.9 ø0.15, 5-core x brown/blue 0.34 mm² 0.000527^{±2}, black/white/pink 0.18 mm² 0.000279^{±2}



FS-N42N/N42P/N44N/N44P Expansion Unit (Cable Type)

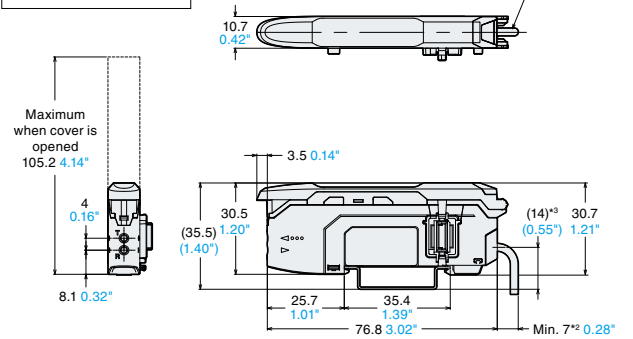ø2.6 ø0.10" 1-core x black 0.34 mm² 0.000527^{±2} *1
Cord length 2 m 6.56'





*1. FS-N44N/N44P is ø3.9 ø0.15, 3-core x black/white/pink 0.18 mm² 0.000279^{±2}

*2. Minimum 8 for FS-N44N/N44P



*3. (13) for FS-N44N/N44P



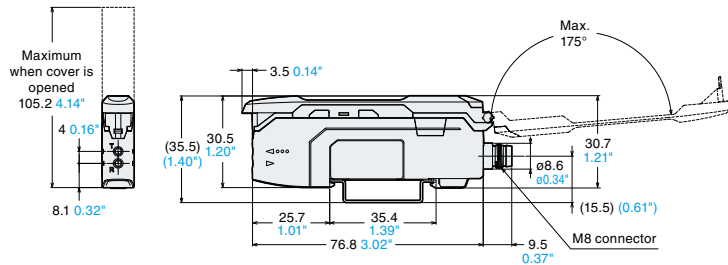FS-N41C Main Unit (M8 Connector Type)




FS-N40 Expansion Unit (Zero Line Type)

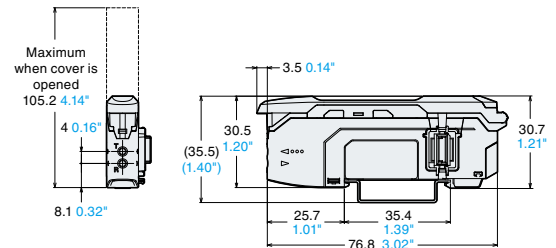


M8 Connector Cable (Optional Part, Sold Separately)

Cable length	L (m feet)
OP-73864	2 6.6'
OP-73865	10 32.8'




Amplifier Securing Bracket (OP-88245 Optional Part, Sold Separately)

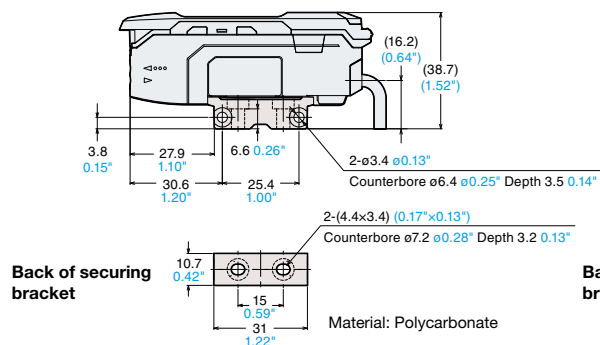Cable Type




M8 Connector Type

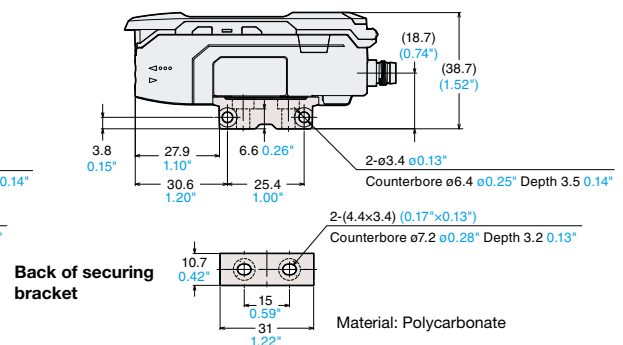


Common to All Models

End Unit


(OP-26751 Optional Part, Sold Separately)



When Mounted on a DIN Rail



When Several Units are Connected

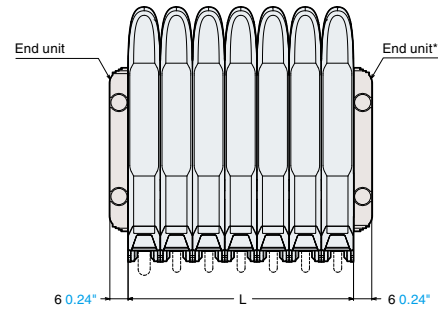


*1. When using expansion units, be sure to use the end units. (Optional)

Total Number	L (mm inch)
1	10.7 0.42"
2	21.4 0.84"
3	32.1 1.26"
4	42.8 1.69"
5	53.5 2.11"
6	64.2 2.53"
7	74.9 2.95"
8	85.6 3.37"
9	96.3 3.79"
10	107 4.21"
11	117.7 4.63"
12	128.4 5.06"
13	139.1 5.48"
14	149.8 5.90"
15	160.5 6.32"
16	171.2 6.74"
17	181.9 7.16"




FS-MC8N/P Multi-Output Unit

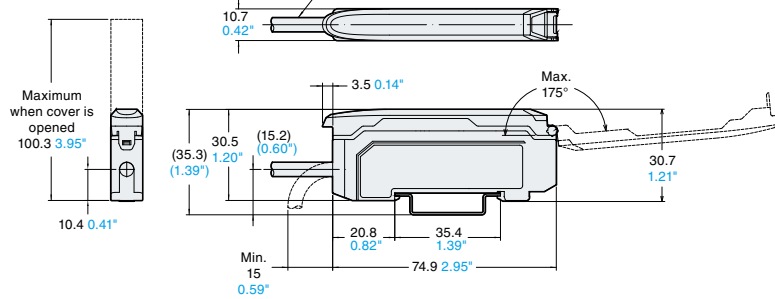ø4.7 ø0.19" 12-core x brown/blue 0.20 mm² 0.000310^{±0.2},
black/white/gray/orange/green/pink/purple/
yellow/red/pink-purple 0.15 mm² 0.0002325^{±0.2}
Cable length: 2 m 6.6'




Multi-Output Unit + Unit Expansion

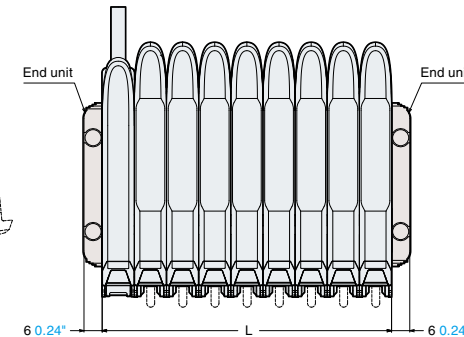


Total Number	L (mm inch)
1	10.7 0.42"
2	21.4 0.84"
3	32.1 1.26"
4	42.8 1.69"
5	53.5 2.11"
6	64.2 2.53"
7	74.9 2.95"
8	85.6 3.37"
9	96.3 3.79"

*1. When using expansion units, be sure to use the end units. (Optional)

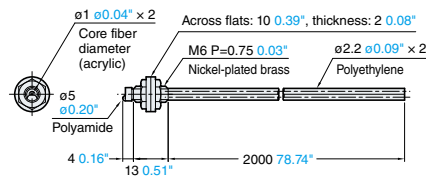
FU-R6F/R67




FU-R67G

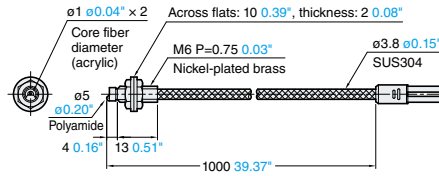


FU-R67TZ

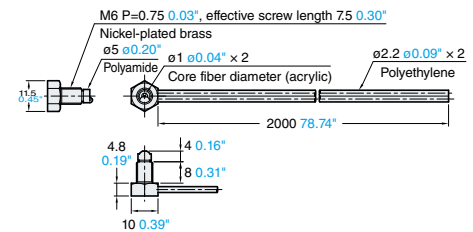


FU-R67TG

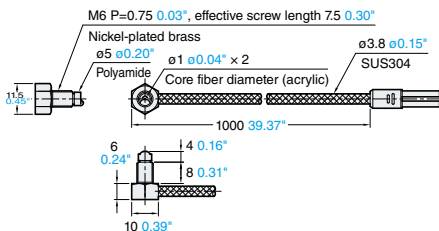


FU-R7F

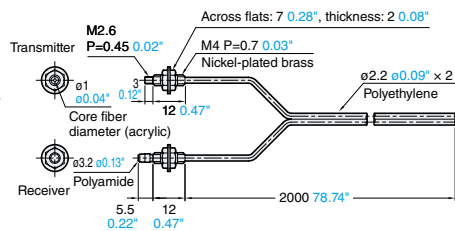


FU-R77

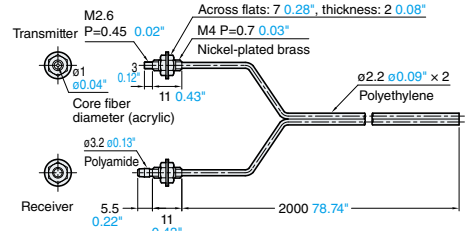


FU-R77G

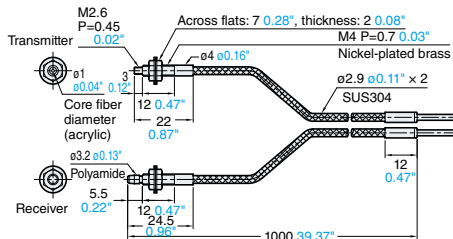

FU-R77TZ

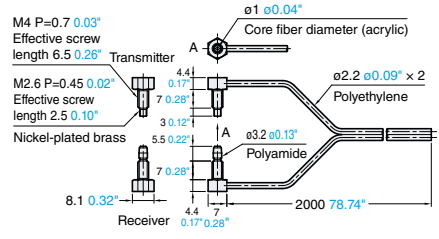

FU-R77TG

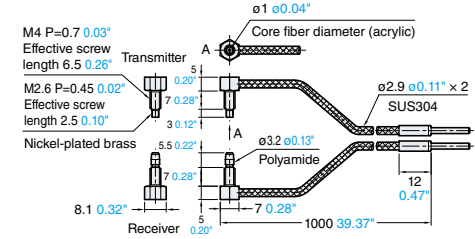

Simple and Reliable
The Solution to Any and All Applications.



CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

KEYENCE CORPORATION OF AMERICA

500 Park Boulevard, Suite 200, Itasca, IL 60143, U.S.A. ☎ +1-201-930-0100 ✉ keyence@keyence.com

CALL TOLL FREE

1 - 8 8 8 - 5 3 9 - 3 6 2 3

1-888-KEYENCE

TO CONTACT YOUR LOCAL OFFICE

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.

Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies.

The specifications are expressed in metric units. The English units have been converted from the original metric units. Unauthorized reproduction of this catalog is strictly prohibited.

Copyright © 2018 KEYENCE CORPORATION. All rights reserved.

01KA-2033

FSN40-KA-C-US 2056-8 611G30